

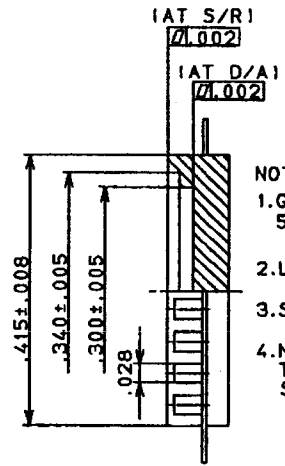
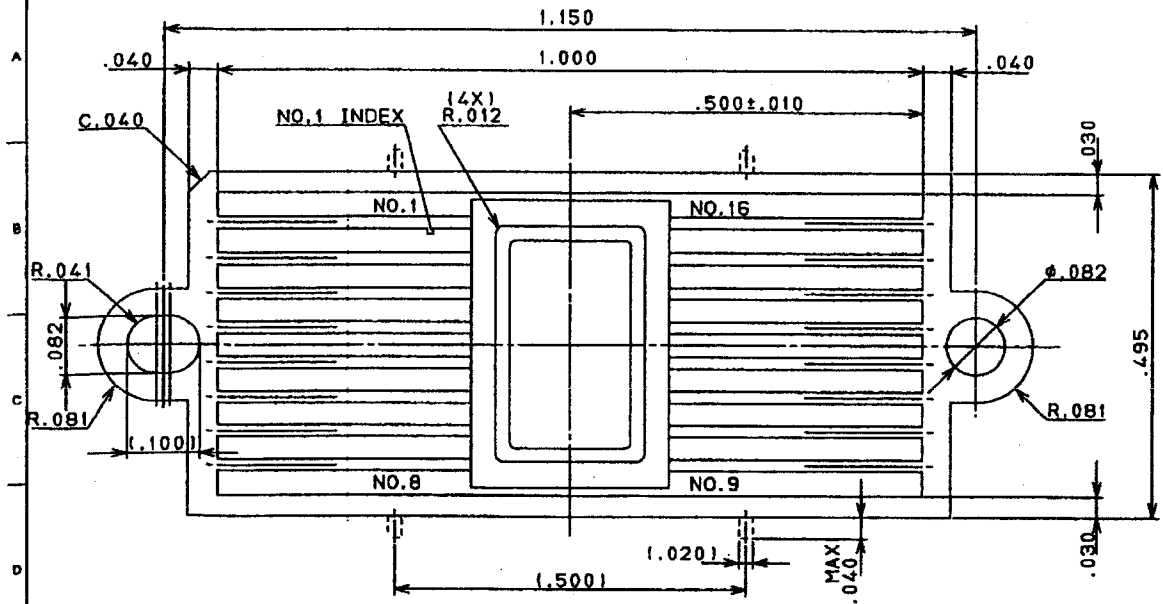


NTK


LATEST REVISIONS DESCRIPTION

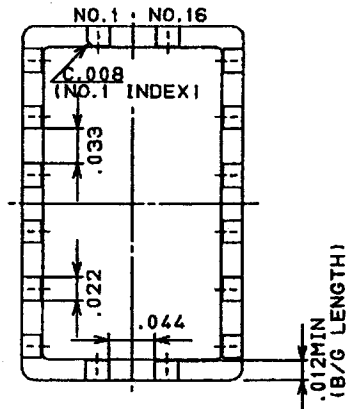

- NOTES
1. GOLD PLATE 60μ INCHES MIN OVER 50 - 350μ INCHES NICKEL.
  2. LEAD RESISTANCE : 200mΩMAX
  3. S/R AND D/A TO BE METALLIZED.
  4. NO LEAD TO BE ELECTRICALLY CONNECTED TO THE DIE ATTACH PAD. SEAL RING ISOLATED.

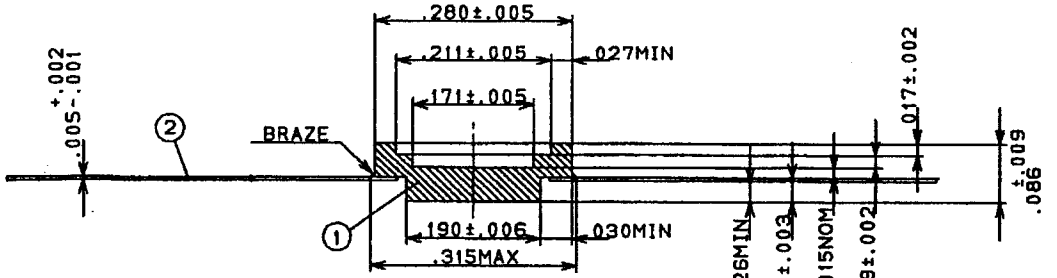

B/G PADS DETAIL

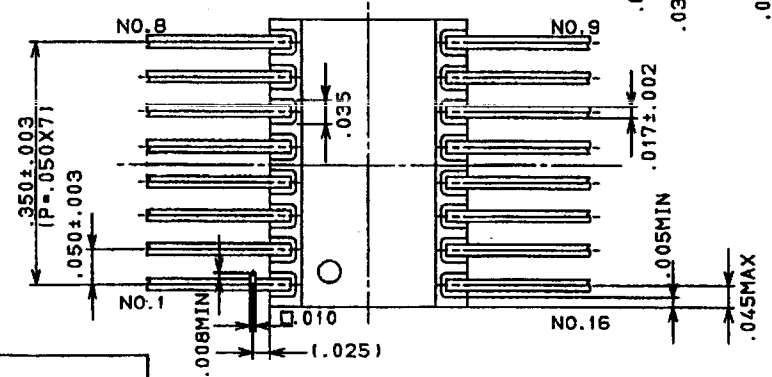

③					
②	LEAD	ALLOY42			
①	CERAMIC	BLACK ALUMINA			
Rev.	Rev.	Description	Date		
1					JUL-06
2					-2004
UNLESS OTHERWISE SPECIFIED					
TOLERANCES ± 1%		DESIGNED BY	C. MATSUURA	NTK	
N. L. T. 1 ORIGINALS & 11 20 75		CHECKED BY	N. NAKAYAMA	NGK SPARK PLUG CO., LTD.	
CUSTOMER		APPROVED BY	T. NOMURA	16 LEAD FLAT PKG	
DWG NO.		SCALE	1/8" = 1" INCH	DWG NO.	IFK16F1-2278B

MODIFIED DWG NO.

PART NO. SHEET 1 OF 1

SSM P/N CCF01620

