



SSM P/N CCF13204



132 LDCC CAP. 475sq
MFG DRWG: PB-F89461-A

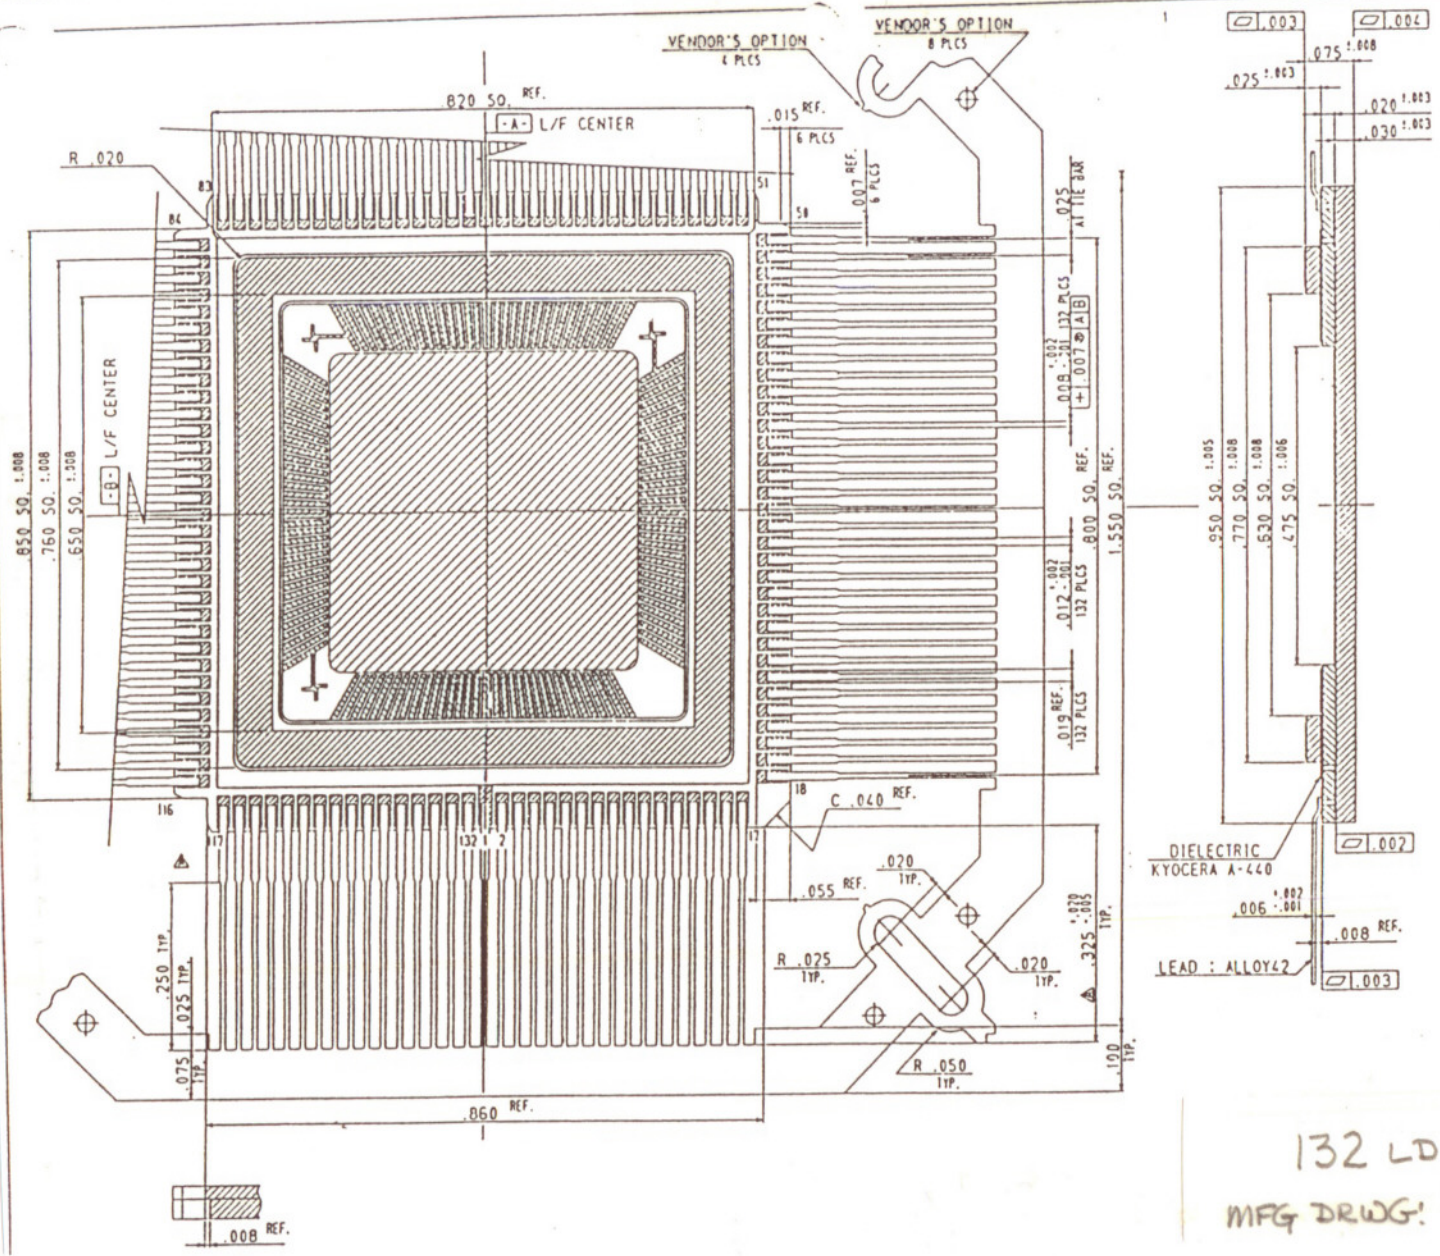

www.spectrum-semi.com Phone: 408-435-5555 Fax: 408-435-8226

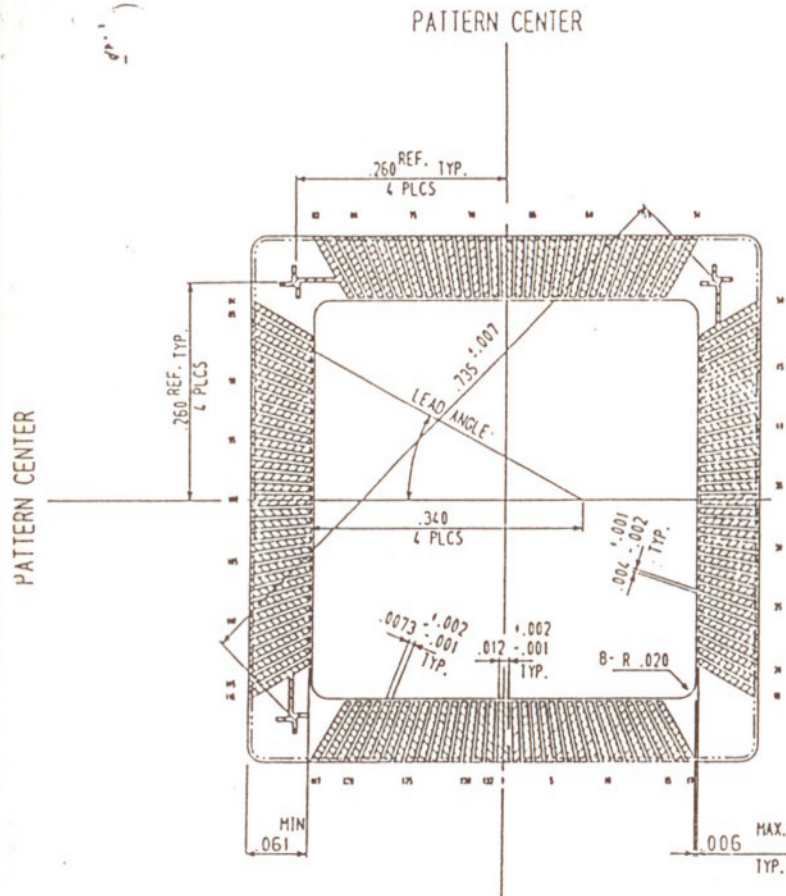

SIGNATURE AND DATE			DESCRIPTION	REV
APPROVAL	ECN NO. 1	DATE		
RACHEL S.	88649	09-19-88	METAL RELEASE	0
RACHEL S.	88810	11-18-91	CHANGE LAYER THICKNESS	1
RACHEL S.	89722	09-27-91	VENDOR CHANGED DRAWING NUMBER	2
SUTEE V.		06-07-91	EXTEND LEAD LENGTH TOWARD METAL TIE BAR	3

BOND FINGERS AND POSITIONS

1	ANGLE	CENTER	START	END
1	0.000	0.0000	-0.0060	0.0060
2	2.291	0.0136	0.0099	0.0173
3	4.200	0.0250	0.0213	0.0287
4	6.106	0.0364	0.0327	0.0401
5	8.006	0.0478	0.0441	0.0515
6	9.898	0.0593	0.0556	0.0630
7	11.701	0.0709	0.0672	0.0746
8	13.652	0.0826	0.0788	0.0864
9	15.509	0.0943	0.0905	0.0981
10	17.350	0.1062	0.1024	0.1100
11	19.174	0.1182	0.1143	0.1221
12	20.979	0.1304	0.1265	0.1343
13	22.763	0.1427	0.1387	0.1467
14	24.525	0.1551	0.1511	0.1591
15	26.264	0.1678	0.1637	0.1719
16	27.978	0.1806	0.1764	0.1848
17	29.656	0.1937	0.1895	0.1979

NOTES

- ALL EXPOSED METAL AND METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCHES MIN. THK. OVER NICKEL PLATED UNLESS OTHERWISE SPECIFIED PURCHASE ORDER.
- FLATNESS METALLIZED PADS ONLY.
- SEAL AREA AND DIE ATTACH AREA SHALL BE ISOLATED FROM ANY LEADS. (ZERO GROUND)
- LEAD TO LEAD LEAKAGE SHALL NOT EXCEED 10 NANO AMP'S AT 100V D.C.
- LEAD RESISTANCE : 1.0 OHM MAX.
- CAPACITANCE : 3.0PF MAX. 1000HZ.
- NO METALLIZATION ON BACK SIDE.
- LEAD PULL STRENGTH TO BE 0.5 LBS MIN. PERPENDICULAR PULL.
- REFERENCE VENDOR KYOCERA : PB-FB9461-A.

