


# SSM P/N CL-61401

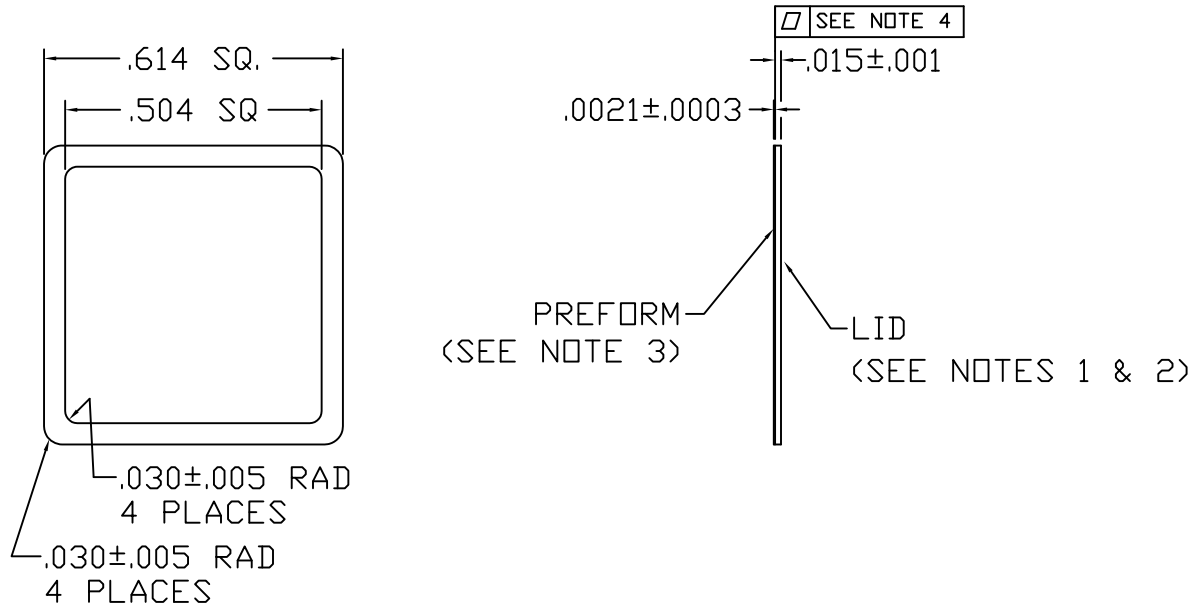

**NOTES**

1. MAT'L : KOVAR OR ALLOY 42
  2. PLATING : 1st LAYER 50/350 MICROINCHES Ni  
               2nd LAYER Au  
               3rd LAYER 50/350 MICROINCHES Ni  
               4th LAYER 25 MICROINCHES MINIMUM Au
- NOTES : TOTAL NICKEL LAYERS SHALL NOT EXCEED 450 MICROINCHES AND THE SUM OF BOTH GOLD LAYERS SHALL BE 50 MICROINCHES MINIMUM.
3. PREFORM - 80% ±1% Au  
               20% Sn
  4. FLATNESS : ONE MIL (.001) MAXIMUM PER 1/2" T.I.R
  5. TOLERANCES TO BE (XXX) 3 PLACES ±.003 UNLESS OTHERWISE NOTED

|             |                       |
|-------------|-----------------------|
| DESCRIPTION | HI REL COMBO LID      |
| DRAWING NO. | HRC-930-21-25-100-T15 |