
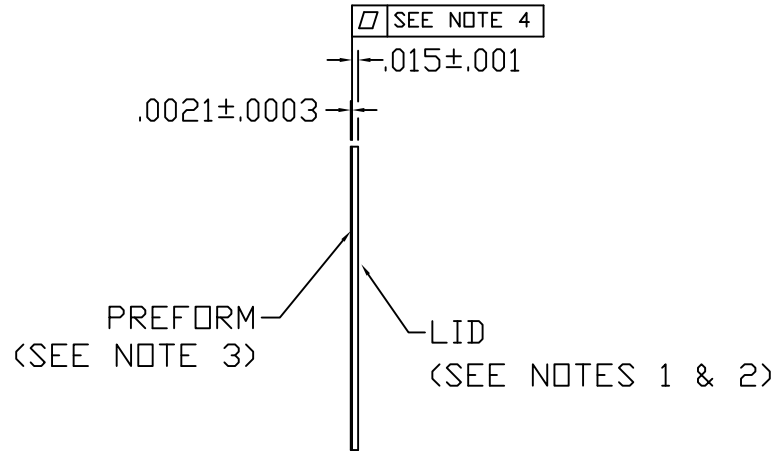


SSM P/N CL-73003

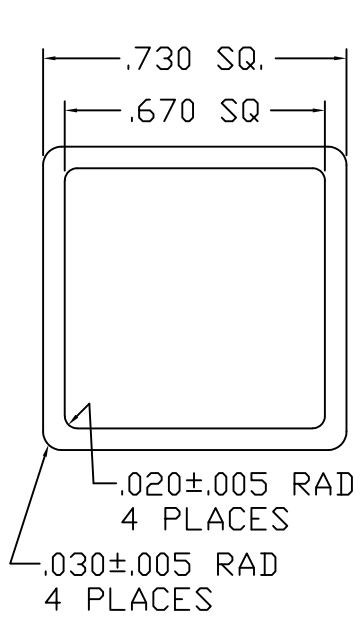

NOTES

1. MAT'L : KOVAR OR ALLOY 42
2. PLATING : 1st LAYER 50/350 MICROINCHES NI
2nd LAYER Au
3rd LAYER 50/350 MICROINCHES NI
4th LAYER 25 MICROINCHES MINIMUM Au
- NOTES : TOTAL NICKEL LAYERS SHALL NOT EXCEED 450 MICROINCHES AND THE SUM OF BOTH GOLD LAYERS SHALL BE 50 MICROINCHES MINIMUM.
3. PREFORM - 80% ±1% Au
20% Sn
4. FLATNESS : ONE MIL (.001) MAXIMUM PER 1/2" T.I.R
5. TOLERANCES TO BE (XXX) 3 PLACES ±.002 UNLESS OTHERWISE NOTED

DESCRIPTION	MFG WILLIAMS ADVANCED MATERIALS	
	MFG DRAWING NO	
HI REL COMBO LID	W1107H-T15	

