
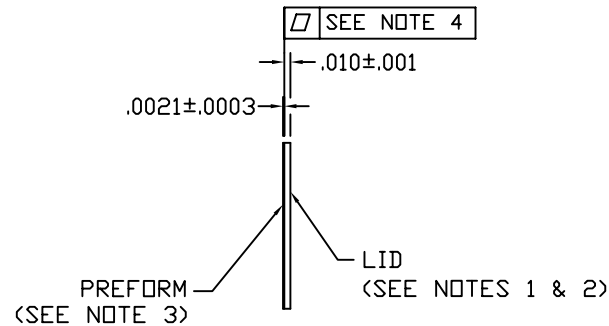


SSM P/N CL543402

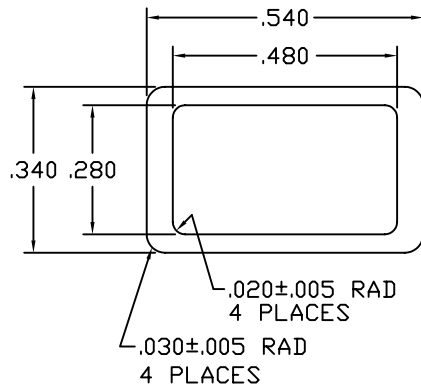

NOTES

1. MAT'L : KOVAR OR ALLOY 42
2. PLATING : 1st LAYER 50/350 MICROINCHES Ni
2nd LAYER 25 MICROINCHES Au
3rd LAYER 50/350 MICROINCHES Ni
4th LAYER 25 MICROINCHES MINIMUM Au

NOTES : TOTAL NICKEL LAYERS SHALL NOT EXCEED 450 MICROINCHES AND THE SUM OF BOTH GOLD LAYERS SHALL BE 50 MICROINCHES MINIMUM.

3. PREFORM - 80% $\pm 1\%$ Au
20% Sn
4. FLATNESS : ONE MIL (.001) MAXIMUM PER 1/2" T.I.R
5. TOLERANCES TO BE (XXX) 3 PLACES $\pm .003$ UNLESS OTHERWISE NOTED

DESCRIPTION	DRAWING NO.
Hi Rel Combo LId	HRC-981-21-25MT/100MNI-S