
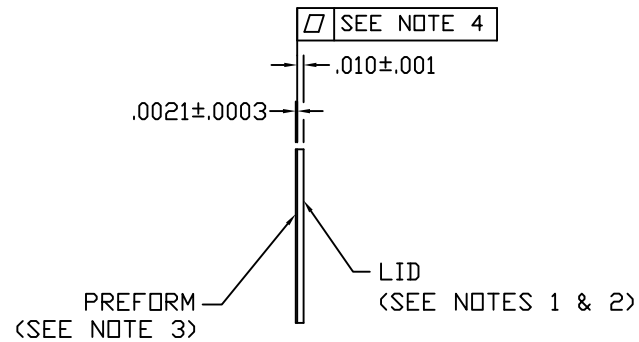


# SSM P/N CL645701

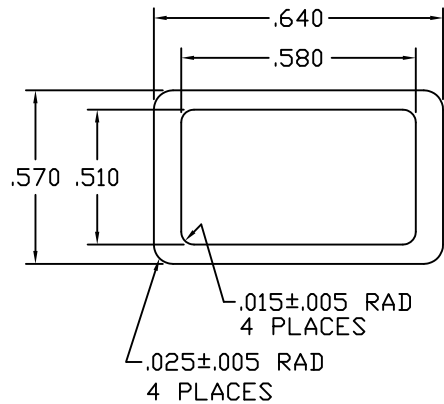

## NOTES

1. MAT'L : KOVAR OR ALLOY 42
  2. PLATING : 1st LAYER 50/350 MICROINCHES Ni  
2nd LAYER Au  
3rd LAYER 50/350 MICROINCHES Ni  
4th LAYER 25 MICROINCHES MINIMUM Au
- NOTES : TOTAL NICKEL LAYERS SHALL NOT EXCEED 450 MICROINCHES AND THE SUM OF BOTH GOLD LAYERS SHALL BE 50 MICROINCHES MINIMUM.
3. PREFORM - 80%  $\pm 1\%$  Au  
20% Sn
  4. FLATNESS : ONE MIL (.001) MAXIMUM PER 1/2" T.I.R
  5. TOLERANCES TO BE (XXX) 3 PLACES  $\pm .003$  UNLESS OTHERWISE NOTED

DESCRIPTION	HRC-964
MFG	Williams Advanced Materials, Inc.

