


SSM P/N CPG08424

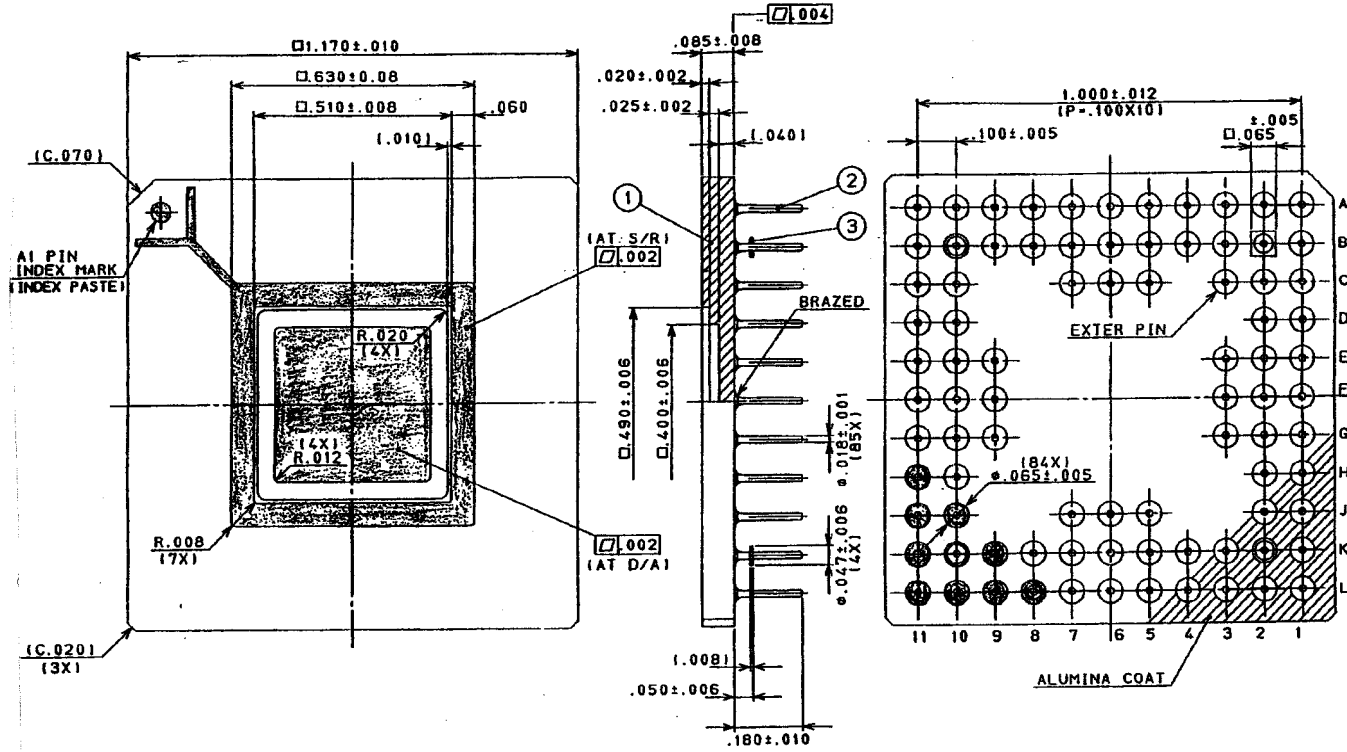

NOTES:


1. GOLD PLATE 60μ INCHES MIN OVER 80μ INCHES MIN NICKEL.
2. NO LEAD TO BE ELECTRICALLY CONNECTED TO THE DIE ATTACH PAD. SEAL RING ISOLATED.
3. LEAD RESISTANCE:
B/G PAD NO.1,11,22,32,43,53,64 AND 74 ----- $200m\Omega$ MAX.
THE OTHERS ----- $500m\Omega$ MAX.
4. SPECIFICATION 1002102 SHALL APPLY.

OPEN-TOOLE

3	STAND OFF PIN	ALLOY42			
2	PIN	ALLOY42			
1	CERAMIC	BLACK ALUMINA			
Rev	Material	Description	Rev.	Description	Date
1	ALLOY42	ALLOY42	1	NEW DRAWING	JUL -08
UNLESS OTHERWISE SPECIFIED			NITTECH TECHNICAL CERAMICS		
TOLERANCES: ± 1%			NGK SPARK PLUG CO., LTD		
N. L. T. DECIMALS: XX ± 01			TITLE		
DECIMALS: XX ± 005			84 PIN GRID ARRAY		
APPROVED	DATE	BY	DATE	BY	DATE
Checked					
UNIT	INCH				ETZE
SCALE					1:1
					IPK84F1-8962A



SSM P/N CPG08424

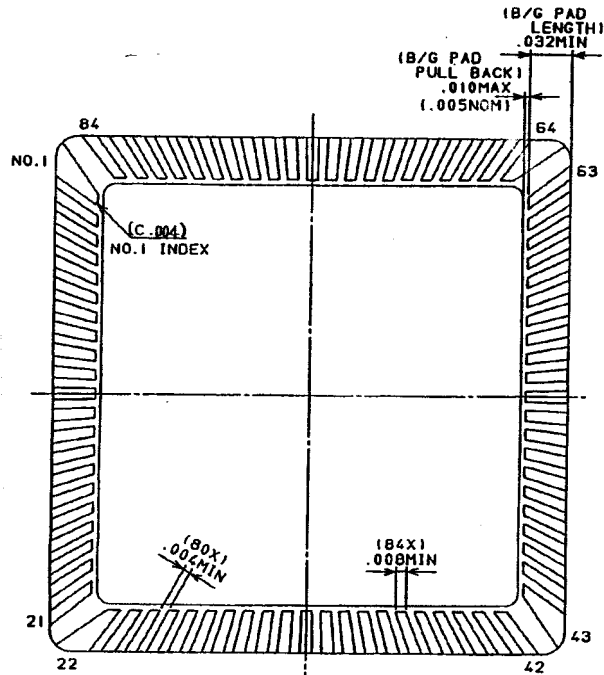

B/G PADS DETAIL

CONNECTION TABLE

PAD	PIN	PAD	PIN	PAD	PIN	PAD	PIN
1	B2	24	L2	47	H10	70	C7
2	C2	25	L3	48	H11	71	B7
3	B1	26	K4	49	G9	72	A7
4	C1	27	L4	50	G10	73	B6
5	D2	28	J5	51	G11	74	C6
6	D1	29	K5	52	F10	75	A6
7	E3	30	L5	53	F9	76	A5
8	E2	31	K6	54	F11	77	B5
9	E1	32	J6	55	E11	78	C5
10	F2	33	L6	56	E10	79	A4
11	F3	34	L7	57	E9	80	B4
12	F1	35	K7	58	D11	81	A3
13	G1	36	J7	59	D10	82	A2
14	G2	37	L8	60	C11	83	B3
15	G3	38	K8	61	B11	84	A1
16	H1	39	L9	62	C10		
17	H2	40	L10	63	A11		
18	J1	41	K9	64	B10		
19	K1	42	L11	65	B9		
20	J2	43	K10	66	A10		
21	L1	44	J10	67	A9		
22	K2	45	K11	68	B8		
23	K3	46	J11	69	A8		

INDEX PIN=C3

OPEN-TOOLE

UNLESS OTHERWISE SPECIFIED TOLERANCES: ± .01 M. L. T. & DECIMALS .005, .01, .015		DATE	JUL - 88
DESIGNED BY	DRN	NEW DRAWING	
CHECKED		Description	
APPROVED			
DATE	INCH	IPK84F1-8962A (1:1)	
SCALE		NSK TECHNICAL CERAMICS NSK SPARK PLUG CO., LTD. TITLE: B/G PADS DETAIL & CONNECTION TABLE	

