




SSM P/N CCF06805

REVISIONS					
ZONE	REV	ECH	DESCRIPTION	DATE	APPROVED
	*A	57384	DEL. WINDOW FRAME AND CHG	07/06/98	
	*B	57807	CHG. NOTE #3 & 4	07/21/98	

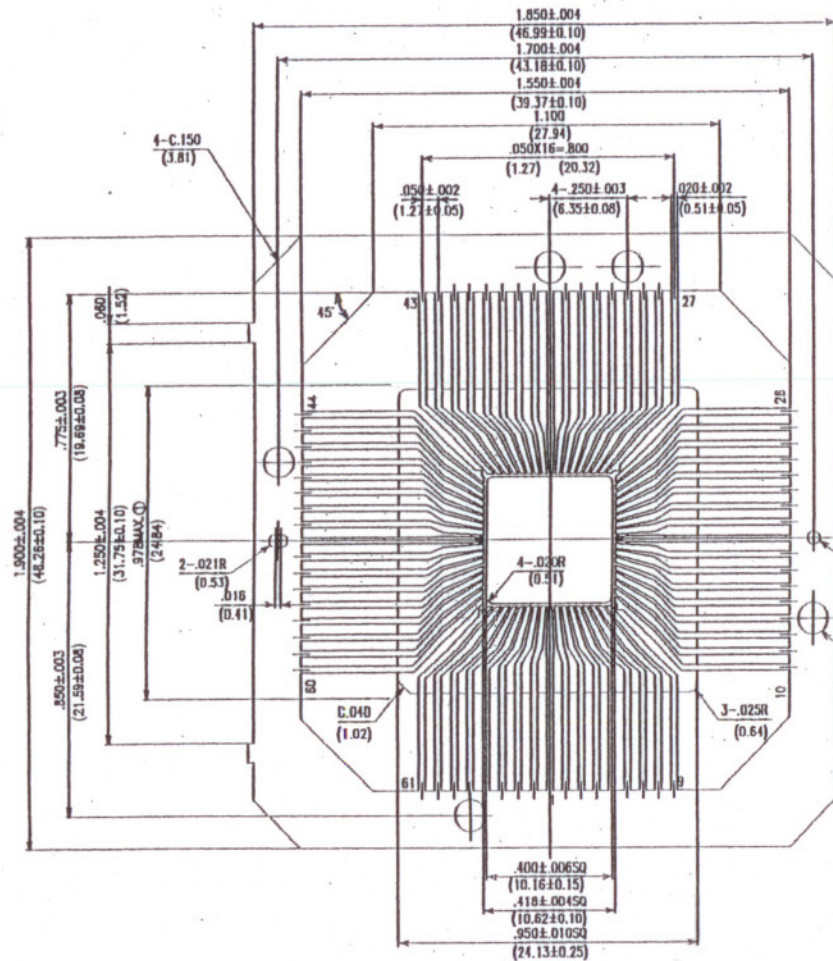

TARGET MARK
No. 10, 27, 44, 61 PIN

No.	X / Y
1	0.181, 0.0071
2	0.361, 0.142
3	0.722, 0.284
4	0.904, 0.356
5	1.270, 0.500
6	1.455, 0.573
7	1.829, 0.720
8	2.019, 0.795
9	2.405, 0.947
10	2.603, 1.025
11	3.005, 1.183
12	3.212, 1.265
13	3.634, 1.431
14	3.852, 1.517
15	4.298, 1.692
16	4.530, 1.783
17	5.004, 1.970

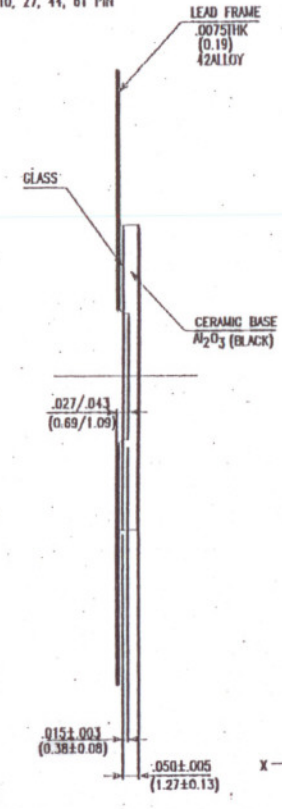

- NOTE
1. MAXIMUM CERAMIC AND GLASS FLOW ON LEADS REFERENCED FROM LEADFRAME CENTERLINE.
 2. LEAD FRAME MATERIAL: ALLOY 42 - THICKNESS: .0075±.0005 (0.190±0.013)
 3. ALUMINIZATION THICKNESS: 100-500 Å INCHES
 4. ALUMINIZATION COVERAGE: 748±0.10 SQ.

