


NTK

LATEST REVISION'S DESCRIPTION

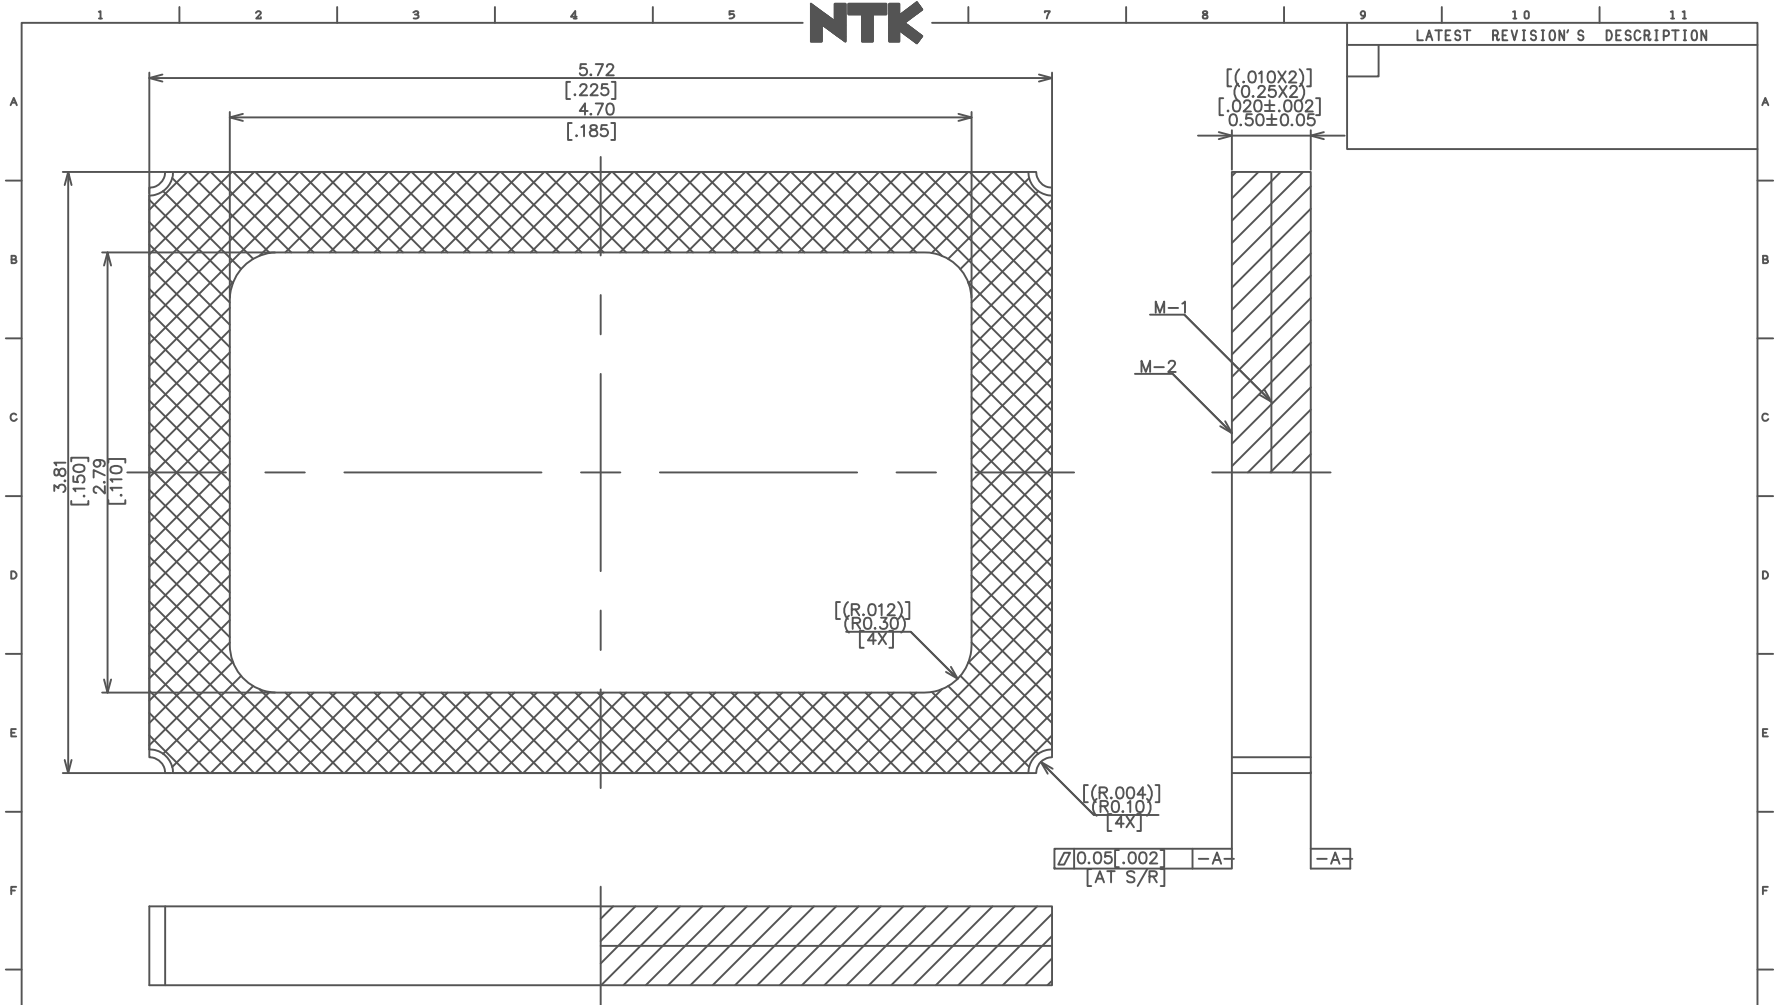

- NOTES:
1. GOLD PLATE 1.0~2.5μm[40~100? INCHES] OVER 2.0μm[80? INCHES] MIN NICKEL OVER W METALLIZATION.
 2. UNLESS OTHERWISE SPECIFIED TOLERANCES: ±0.13[±.005]
 3. NTK SPEC YS-1021 SHALL APPLY.

MODIFIED DWG NO.


③					
②					
①	CERAMIC	BA-916		NEW DRAWING	AUG.-01-2012
Item	Name	Material	Description	Rev.	Date
UNLESS OTHERWISE SPECIFIED TOLERANCES: ± 1%			DRAWN	T.MIYAJI	NTK
N. L. T. 1 SPECIMEN N.Y. 10-05			CHECKED	H.OOHASHI	NGK SPARK PLUG CO., LTD.
CUSTOMER			APPROVED	S.NISHIMURA	TITLE
SPECTRUM			UNIT	MM [INCH]	CERAMIC LID
DWG NO.			SCALE		DWG NO. IEK00F1-1104A

PART NO. SHEET 1 OF 1



NTK

LATEST REVISION'S DESCRIPTION

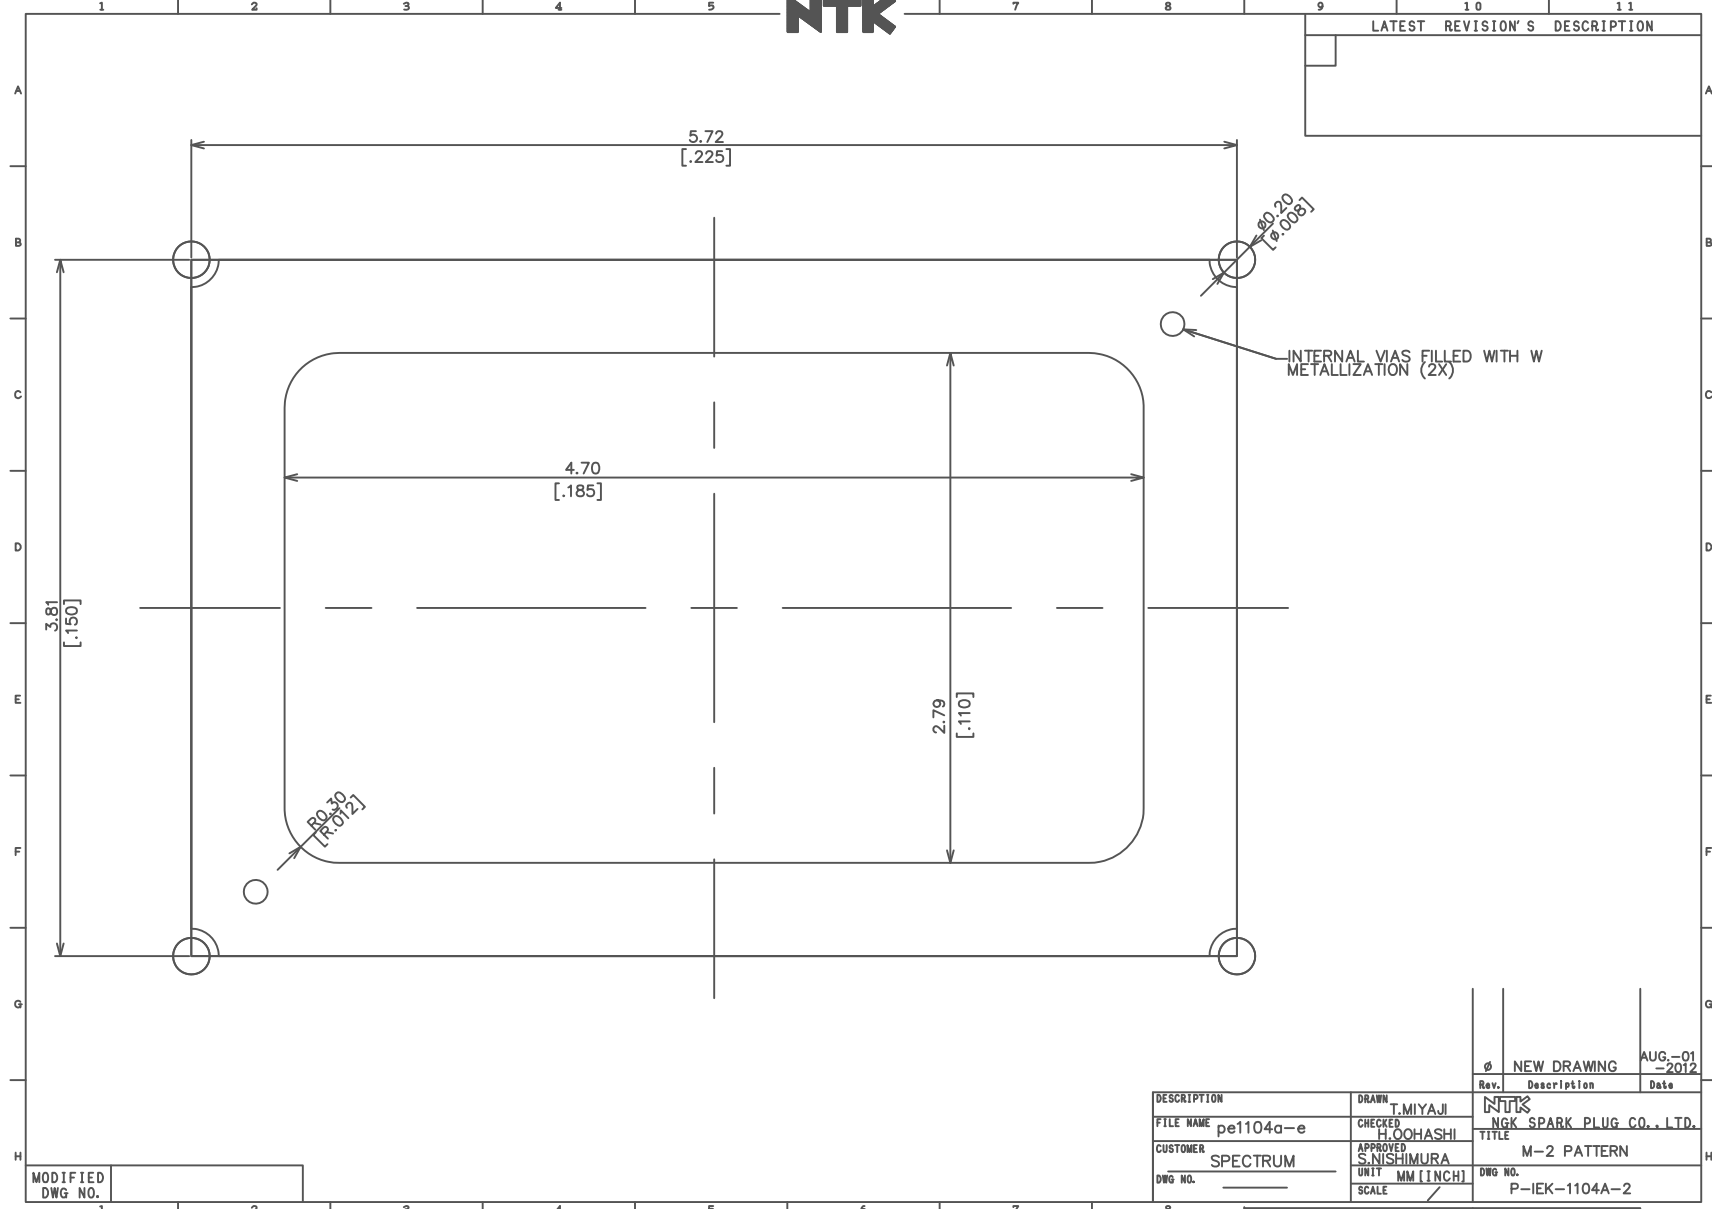


MODIFIED
DWG NO.

DESCRIPTION	DRAWN	T.MIYAJI	NEW DRAWING	AUG.-01
FILE NAME	CHECKED	H.OOHASHI	NTK	-2012
CUSTOMER	APPROVED	S.NISHIMURA	NGK SPARK PLUG CO., LTD.	
DWG NO.	UNIT	MM [INCH]	TITLE	M-2 PATTERN
	SCALE		DWG NO.	P-IEK-1104A-2


PART NO. SHEET OF



SSM P/N CRA221502

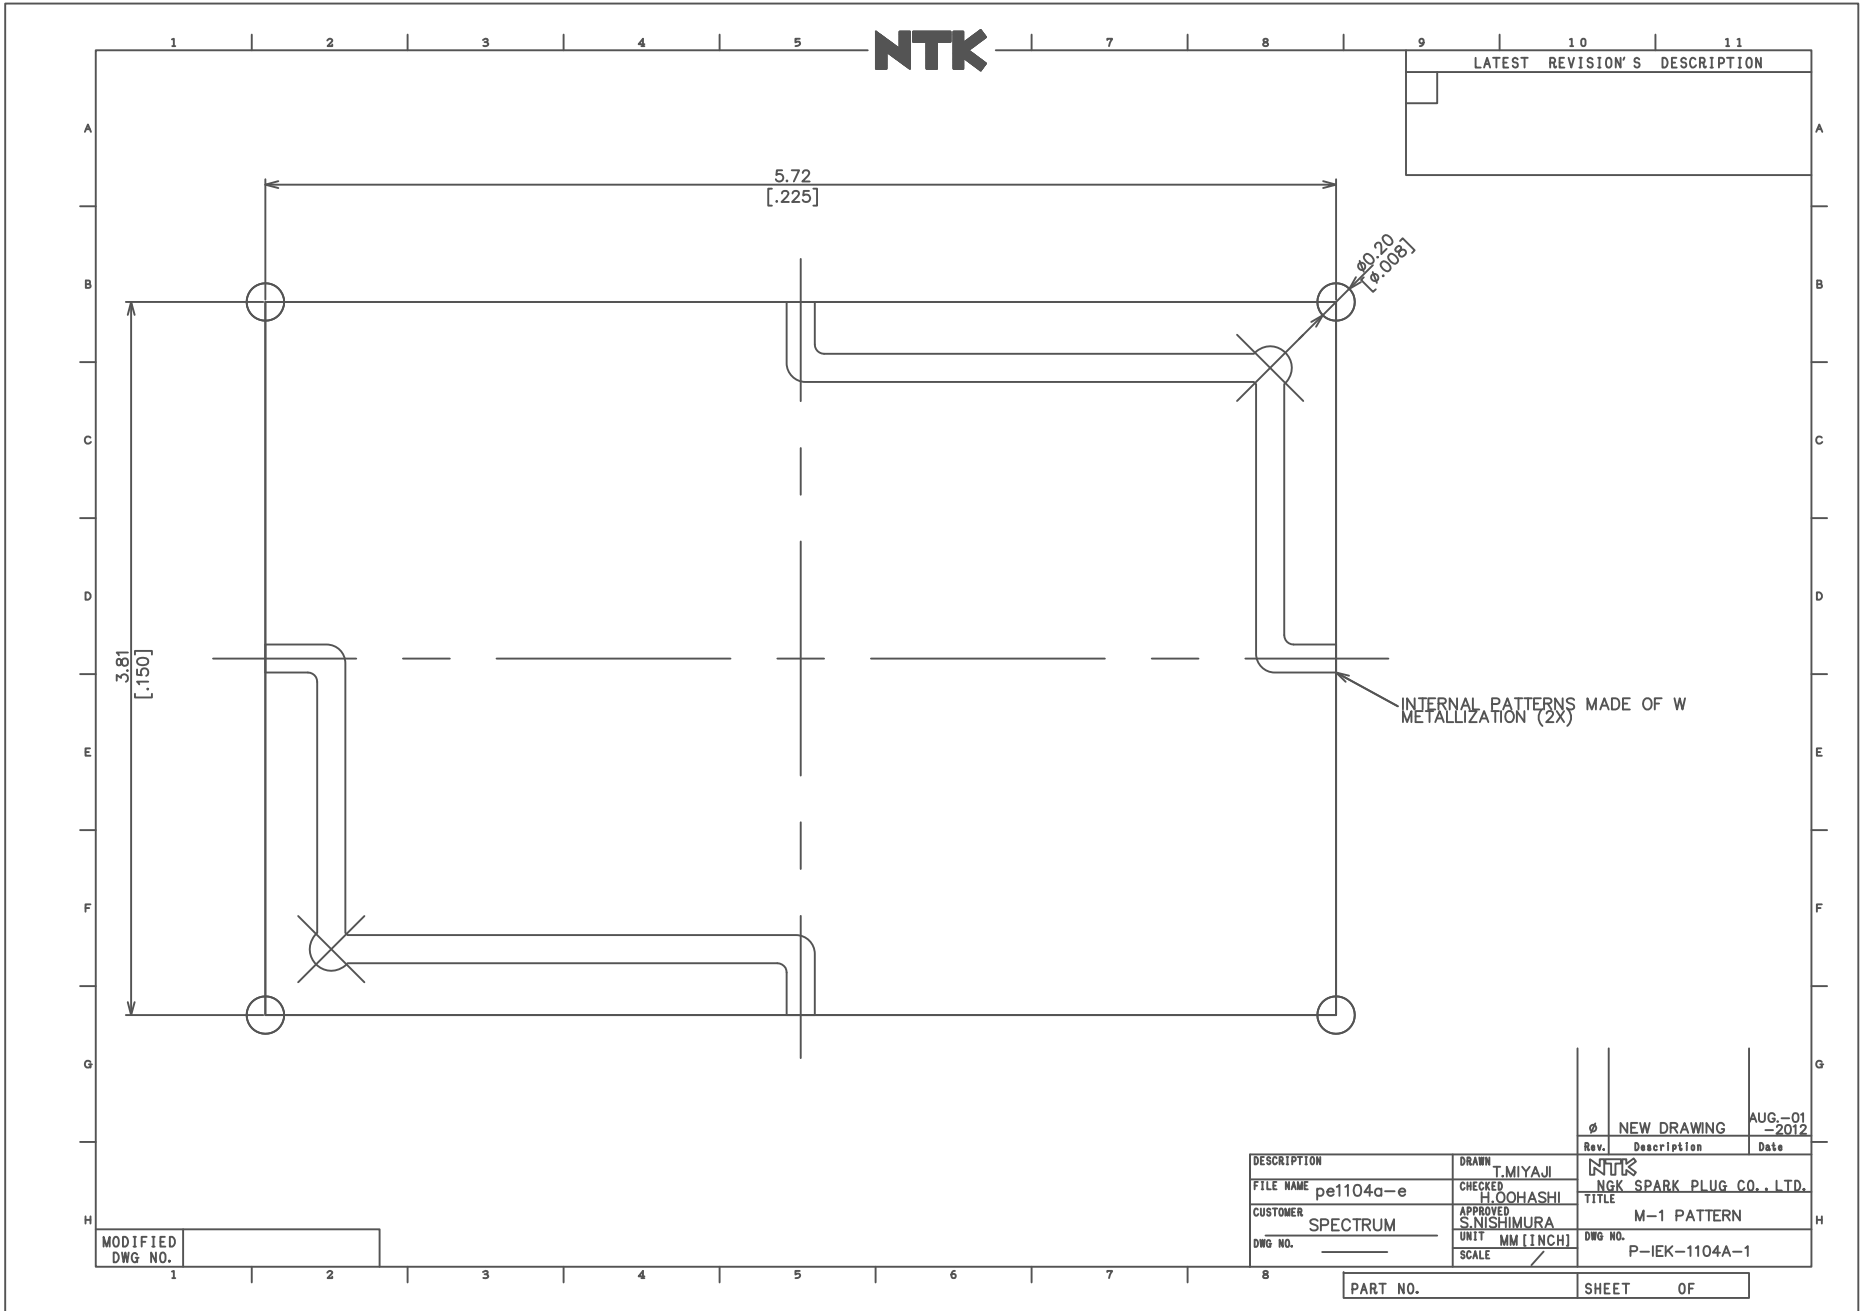

SSM P/N CRA221502

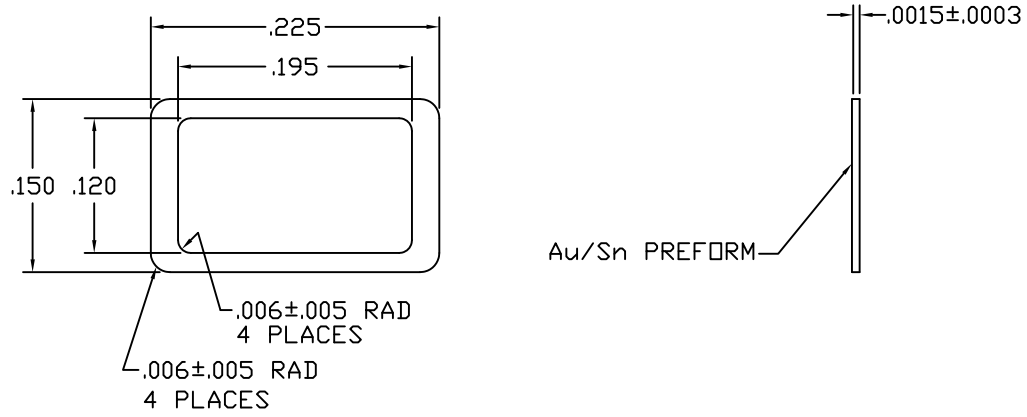

NOTES

1. PREFORM - 80% ±1% Au
20% Sn
2. FLATNESS : ONE MIL (.001) MAXIMUM PER 1/2" T.I.R
3. TOLERANCES TO BE (XXX) 3 PLACES ±.003 UNLESS OTHERWISE NOTED

DESCRIPTION

SOLDER PREFORM - SEE NOTE 1