SSM P/N CSB03225

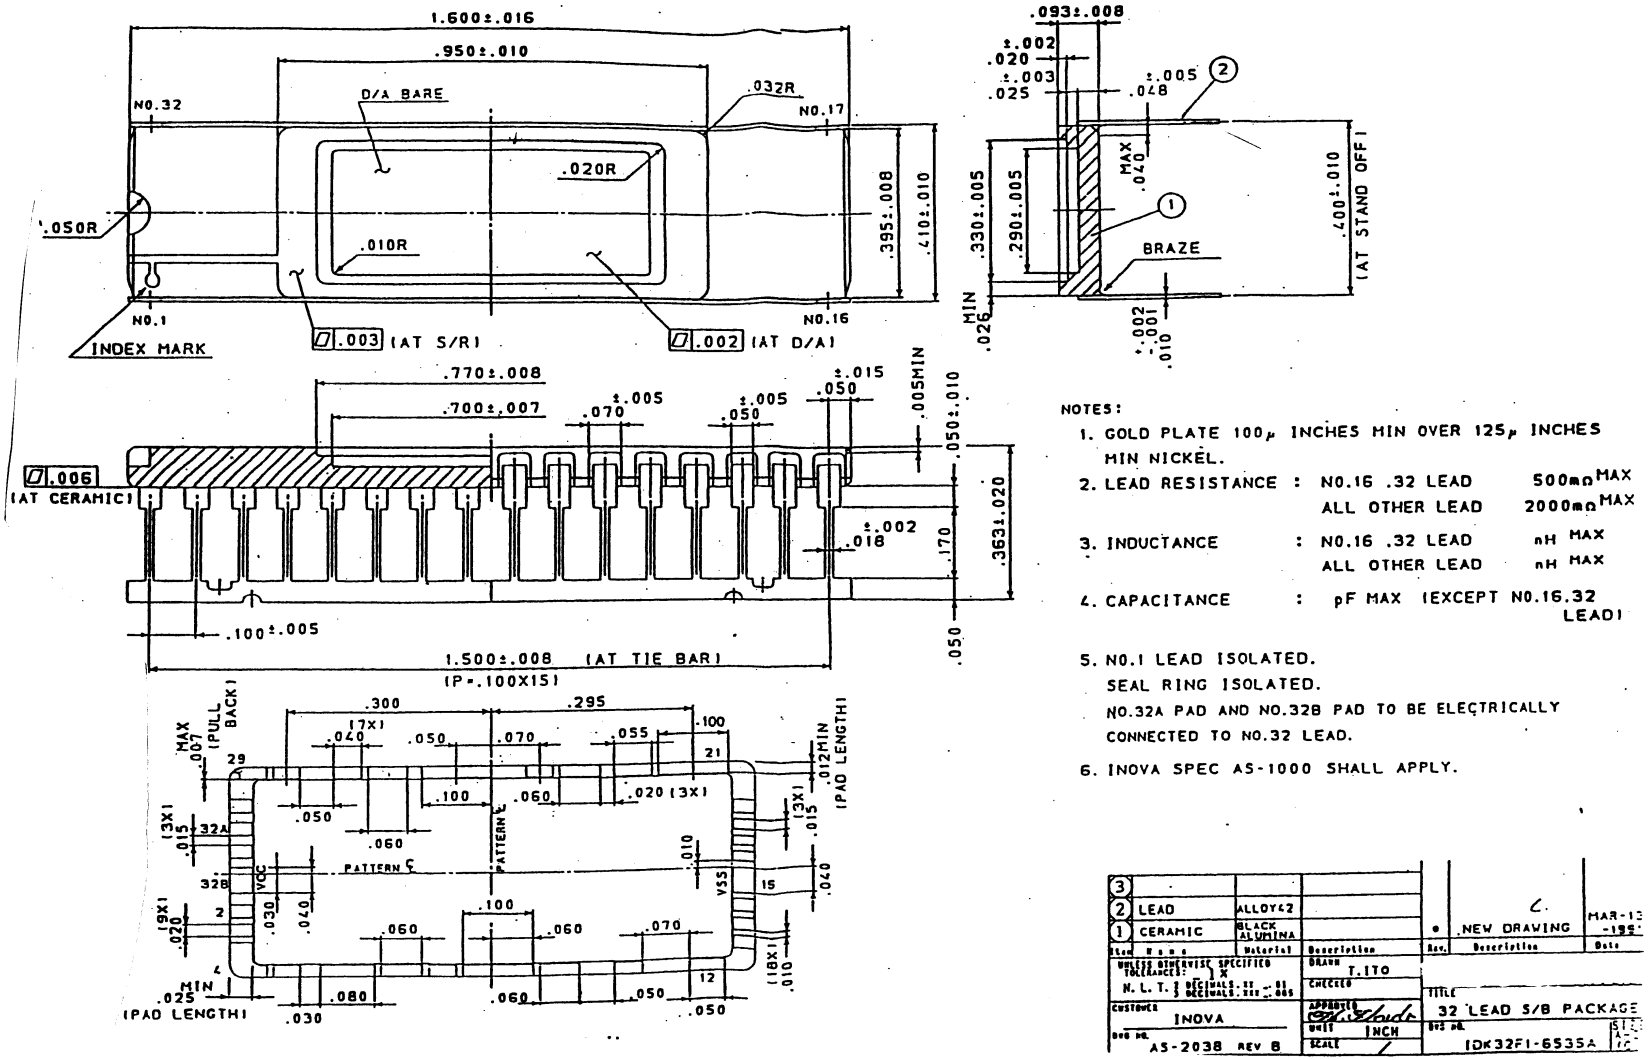

NOTES:

1. GOLD PLATE 100μ INCHES MIN OVER 125μ INCHES MIN NICKEL.
2. LEAD RESISTANCE : NO.16 .32 LEAD 500mΩ MAX
   ALL OTHER LEAD 2000mΩ MAX
3. INDUCTANCE : NO.16 .32 LEAD nH MAX
   ALL OTHER LEAD nH MAX
4. CAPACITANCE : pF MAX (EXCEPT NO.16.32 LEAD)
5. NO.1 LEAD ISOLATED.
   SEAL RING ISOLATED.
   NO.32A PAD AND NO.32B PAD TO BE ELECTRICALLY CONNECTED TO NO.32 LEAD.
6. INOVA SPEC AS-1000 SHALL APPLY.

3						
2	LEAD	ALLOY42				
1	CERAMIC	BLACK ALUMINA		C	NEW DRAWING	MAR-13-19
Item	Name	Material	Description	Rev.	Description	Date
UNLESS OTHERWISE SPECIFIED TOLERANCES:) X N. L. T.) DECIMALS: XX ± .01) DECIMALS: XXX ± .005			DRAWN T.ITO			
			CHECKED		TITLE 32 LEAD S/B PACKAGE	
CUSTOMER INOVA			APPROVED			
DWG NO. AS-2038 REV B			UNIT INCH		DWG NO. IDK32F1-6535A	SIZE A
			SCALE			