



REVISIONS					
REV	ZONE	ECO #	DESCRIPTION	CHANGED BY	DATE
A			INITIAL DESIGN		Apr-26-2006
B			CHNGE SPEC		MAY-16-2008

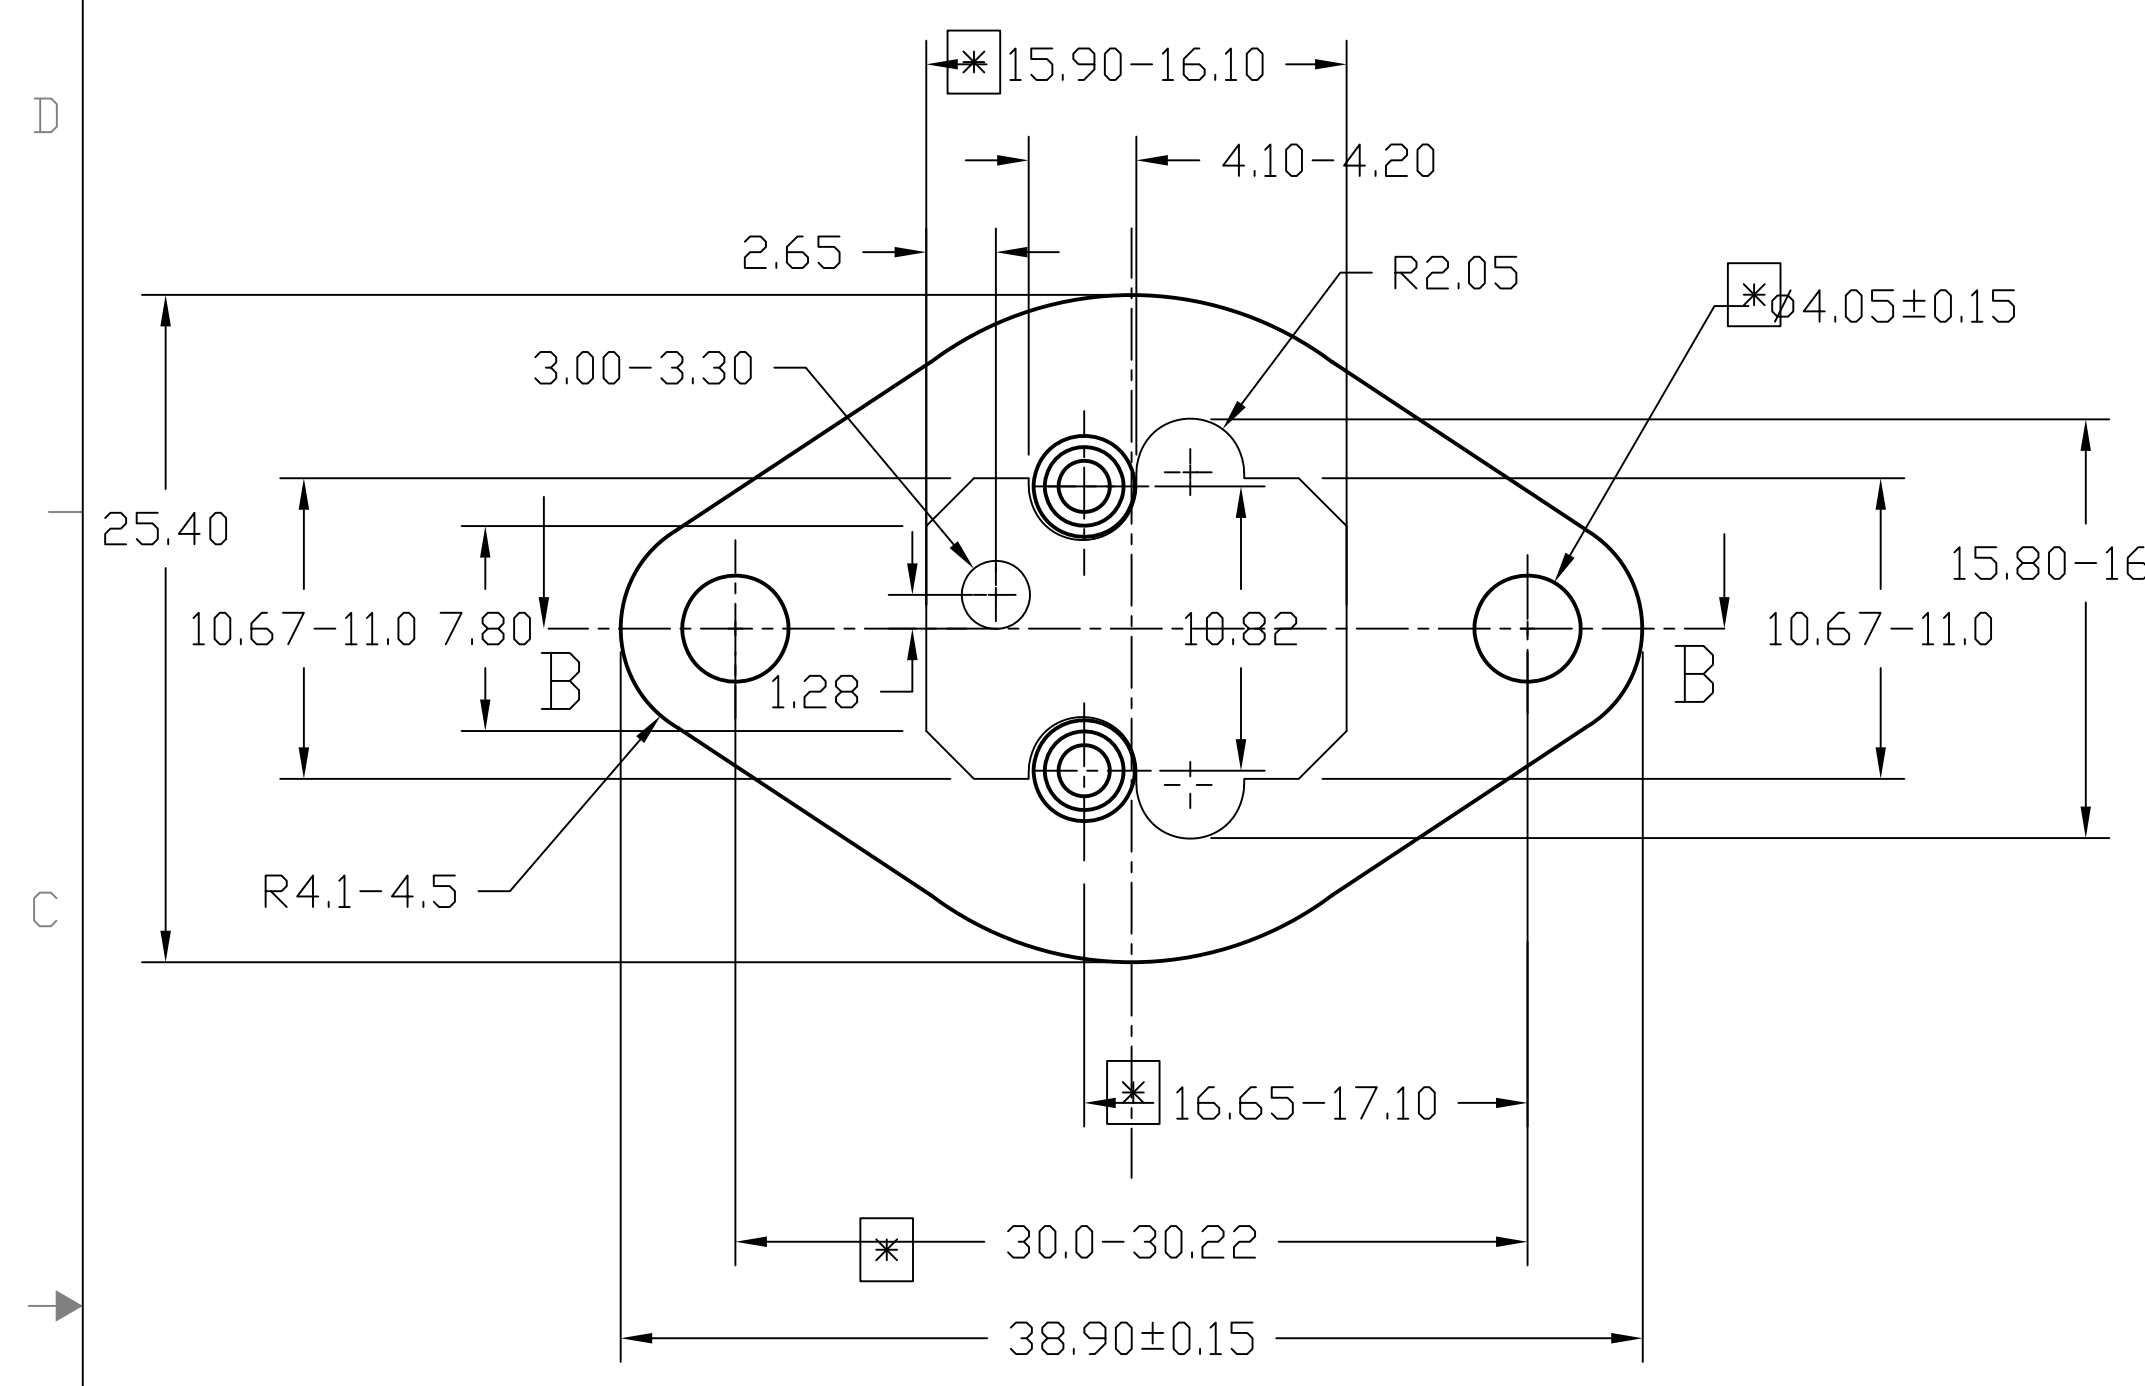

NOTES:

1. MATERIAL: SEE BILL OF TABLE
2. BRAZING RESIDUAL, SCORING OF HOLES ON UPPER PART OUTSIDE DIAMETER 20MM ARE NOT ALLOWED.
3. FINISHING: 1.27 μM MIN GOLD OVER 2.50 μM NICKEL.
4. HERMETICITY: 1 X 10⁻⁸ ATMCC/S
5. PARTS TO BE FREE OF OIL, GREASE TO OTHER CONTAMINATES.
6. CERTIFICATE OF COMPLIANCE SHALL ACCOMPANY EACH SHIPMENT.
7. SHIPPING: PARTS TO BE PACKAGED TO PREVENT DAMAGE TO LEADS.
8. THE SUPPORT SURFACE OF THE RELATIVE TO THE AREA OF THE CENTRAL AXIS HOLES OF THE ANCHORAGE MUST HAVE CONCAVITY 0.04MM MAX AND CONVEXITY 0.16 MAX.
9. DIMENSIONS WITH * ARE IQC INSPERTION.

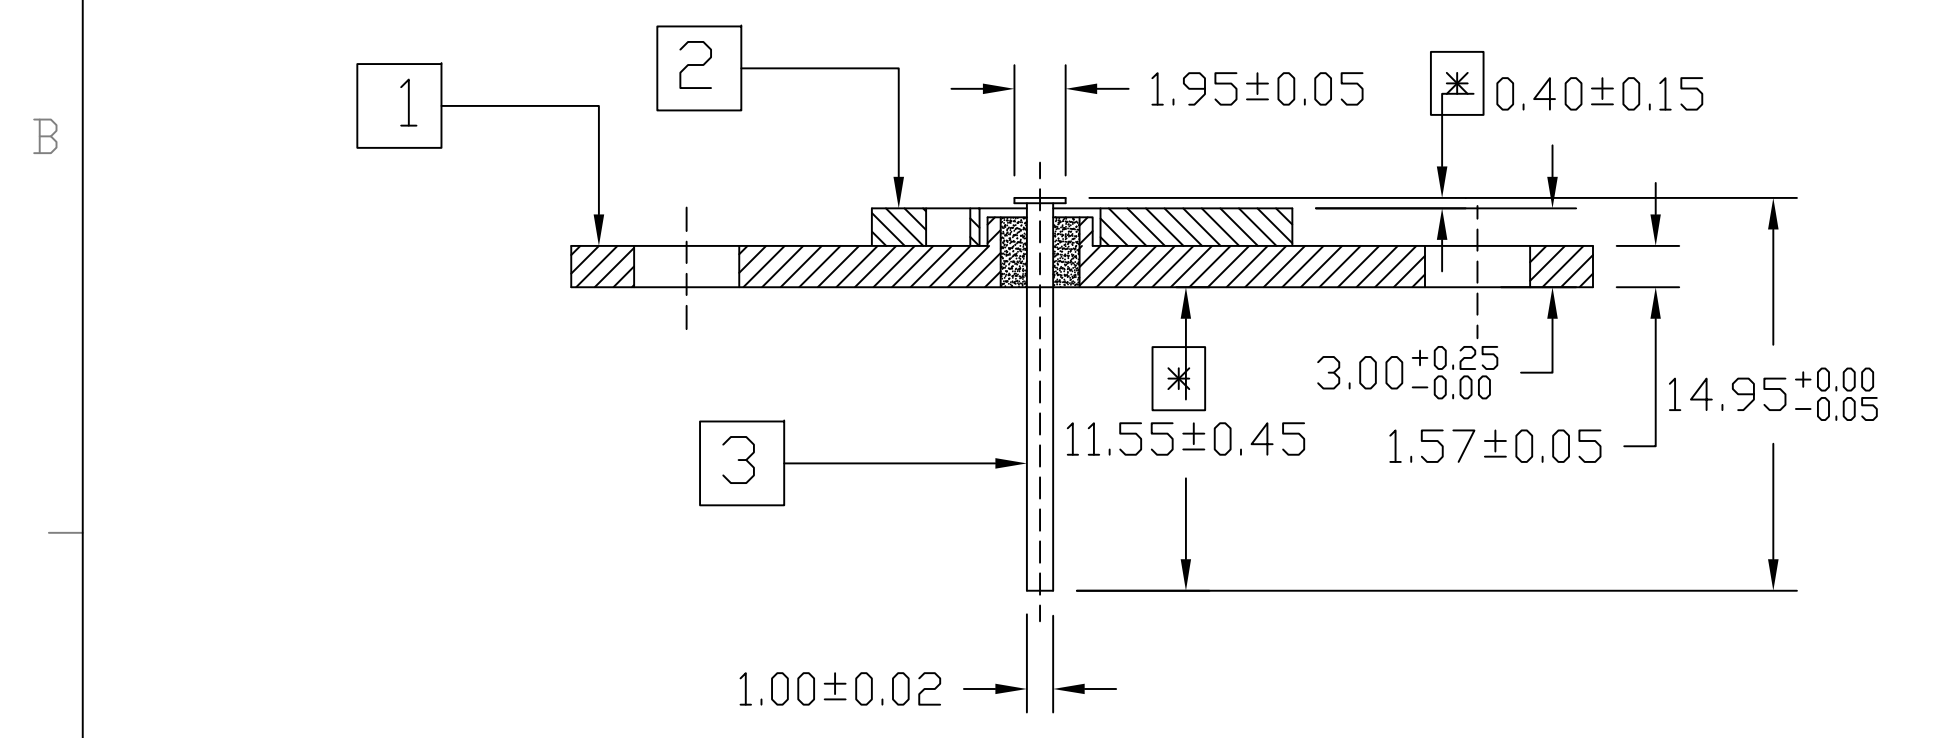

SECTION B-B

BILL OF MATERIAL			
ITEM	P/N	Description	Q'ty
1	050-01595-01	FLANGE, CRS 1010	1
2	050-01595-02	HEATSINK, COPPER (DFHC)	1
3	050-01595-03	NAIL HEAD LEAD ALLOY 52	2
4	050-01595-04	GLASS PREFORM	2

TOLERANCE (All Dimensions are in mm unless otherwise specified.)

.X	.XX	.XXX	Angle	Fraction
---	0.13	---	0.5°	1/64

TITLE	TO-3(0) HEADER, GOLD PLATED		
P/N	050-01595-00	REVISION	B

Drawn By:	Checked By:	Approved By:	Scale:	Sheet:
JOHN ZHAO	JOHN.Z	RICHARD HE	1 : 1	1 of 1

