


# SSM P/N LCC03202

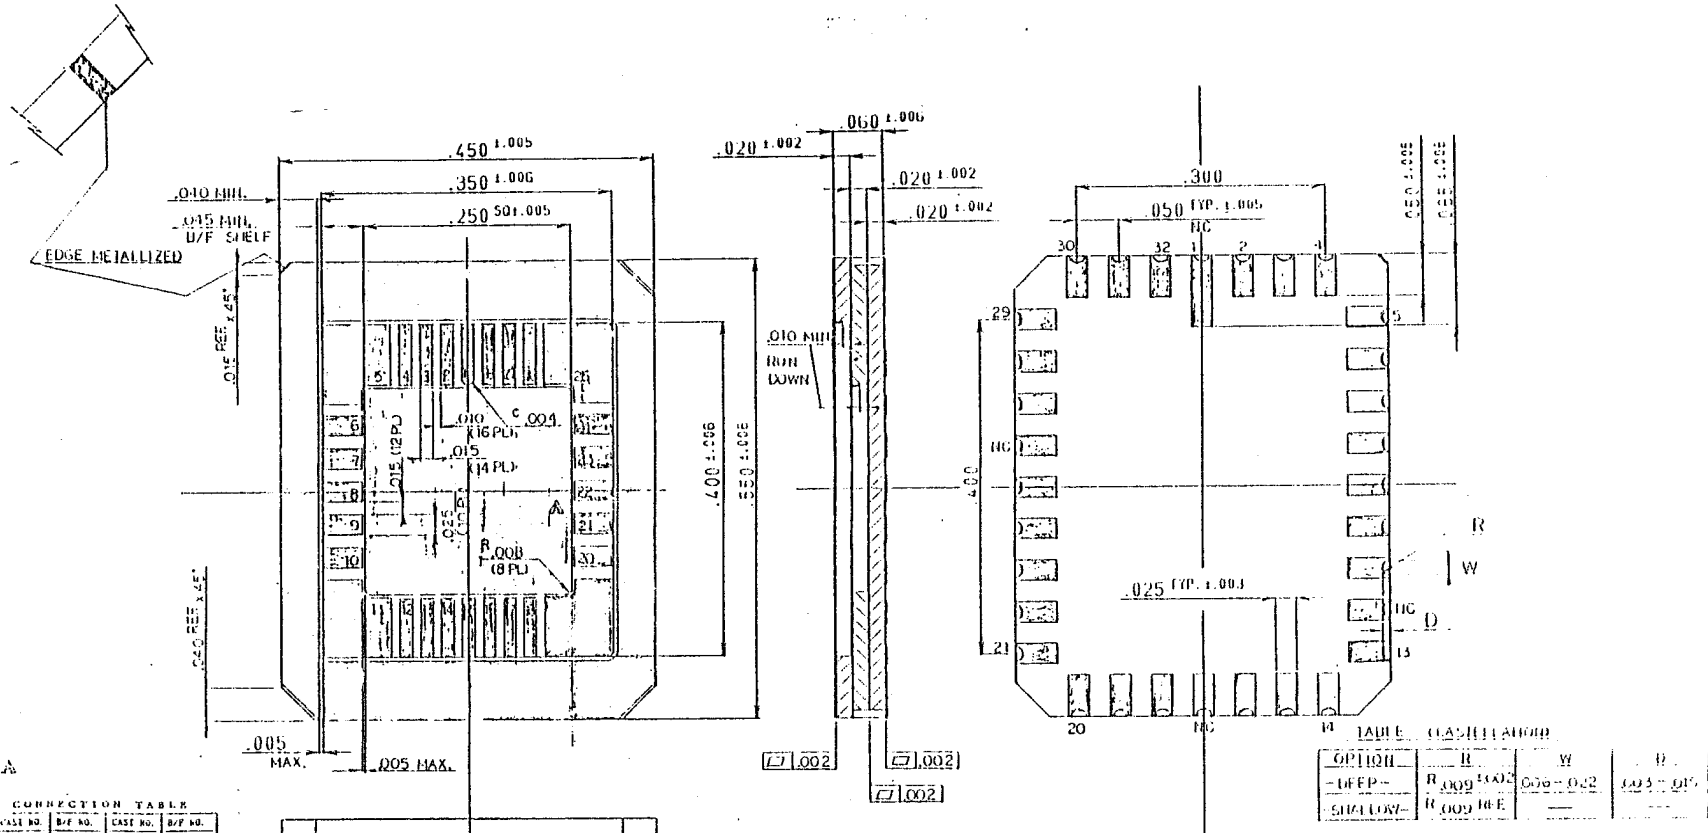

CONNECTION TABLE

CASE NO.	D/F NO.	CASE NO.	D/F NO.
1	1	17	1
2	2	18	1
3	3	19	1
4	4	20	1
5	5	21	1
6	6	22	1
7	7	23	1
8	8	24	1
9	9	25	1
10	10	26	1
11	11	27	1
12	12	28	1
13	13	29	1
14	14	30	1
15	15	31	1
16	16	32	1

- NOTE:
1. ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 50 MICRO INCHES THK. OVER NICKEL PLATING UNLESS OTHERWISE SPECIFIED IN PURCHASE ORDER.
  2. INSULATION RESISTANCE: 100M AT 100V DC.
  3. LEAD RESISTANCE: 0.2Ω MAX.
  4. FLATNESS PERTAINS METALLIZED PADS ONLY.
  5. SEAL AREA AND DIE ATTACH AREA SHALL BE ISOLATED FROM ANY LEADS. (ZERO GROUND)

TABLE: CASE HISTORY

OPTION	R	W	D
-D/F P-	R 009 1.002	006-022	003-015
-SHAFT KEY-	R 009 1.002		

NAME (V00-32GZ)		TOLERANCE	DESIGN	CHECK
32LCC 250 SQ (AVI)		UNLESS OTHERWISE SPECIFIED	2 1 2	
STYLE MATERIAL		HUI 1.005	APPROVED	DATE
10	KYOCERA A-410			
KYOCERA CORPORATION		KYOTO JAPAN	JRC No. PB-C85531-H	



www.spectrum-semi.com Phone: 408-435-5555 Fax: 408-435-8226