

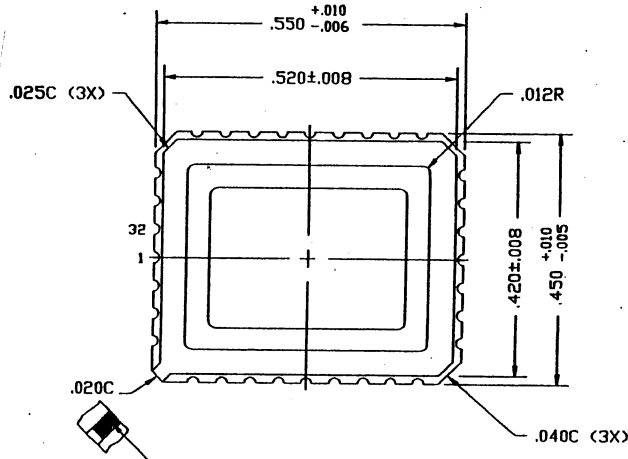

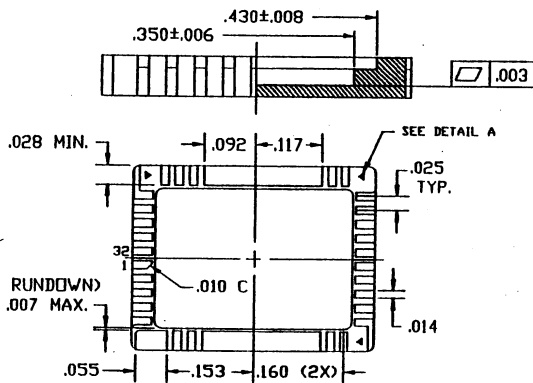


SSM P/N LCC03252

| REVISIONS | | | | | |
|-----------|-----|-------|---------------------------|----------|----------|
| ZONE | REV | ECN | DESCRIPTION | DATE | APPROVED |
| | *A | 1317 | CHG. TO CYPRESS FORMAT | 08/01/95 | |
| | *B | 66342 | CORRECT PART # TO LCC32R4 | 02/08/00 | |

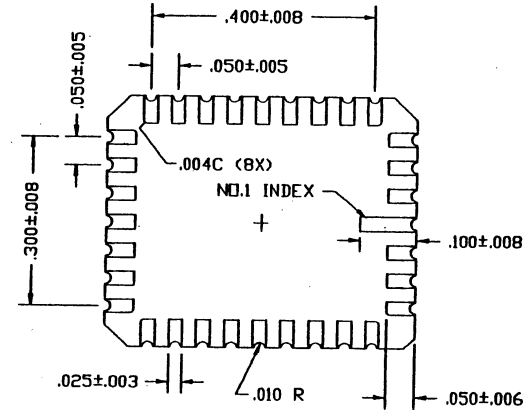

THIS METALLIZE TO BE ELECTRICALLY CONNECTED TO S/R

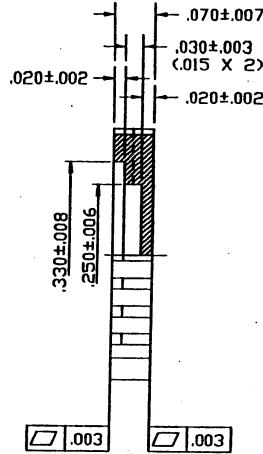

NOTES:

1. GOLD PLATE 80 u INCHES MIN. OVER
80 u INCHES MIN. NICKEL.
2. SEAL RING AND DIE ATTACH PAD ARE ISOLATED.
3. LEAD RESISTANCE _____ 250 mΩ MAX.
4. ALL PARTS SHALL CONFORM TO SPECIFICATION NO. 03-00027

| UNLESS OTHERWISE SPECIFIED | DESIGNED BY | DATE |
|--|-------------|----------|
| ALL DIMENSIONS ARE IN INCHES - STANDARD TOLERANCES ON: | DRAWN | DATE |
| DECIMALS | HTN | 02/08/00 |
| XX ± .01 | CHK BY | DATE |
| XXX ± .005 | APPROVED BY | DATE |
| XXXX ± .001 | APPROVED BY | DATE |
| MATERIAL | | |
| SEE NOTE | | |
| FINISH | | |

| | | | |
|--------------------|----------|----------|--------------|
| TITLE | | | |
| 32 R LCC 250 X 350 | | | |
| SIZE | PART NO. | DWG NO. | REV |
| B | LCC32R4 | 51-20078 | *B |
| SCALE | 5 X | | SHEET 1 OF 1 |

