


SSM P/N CQF04403

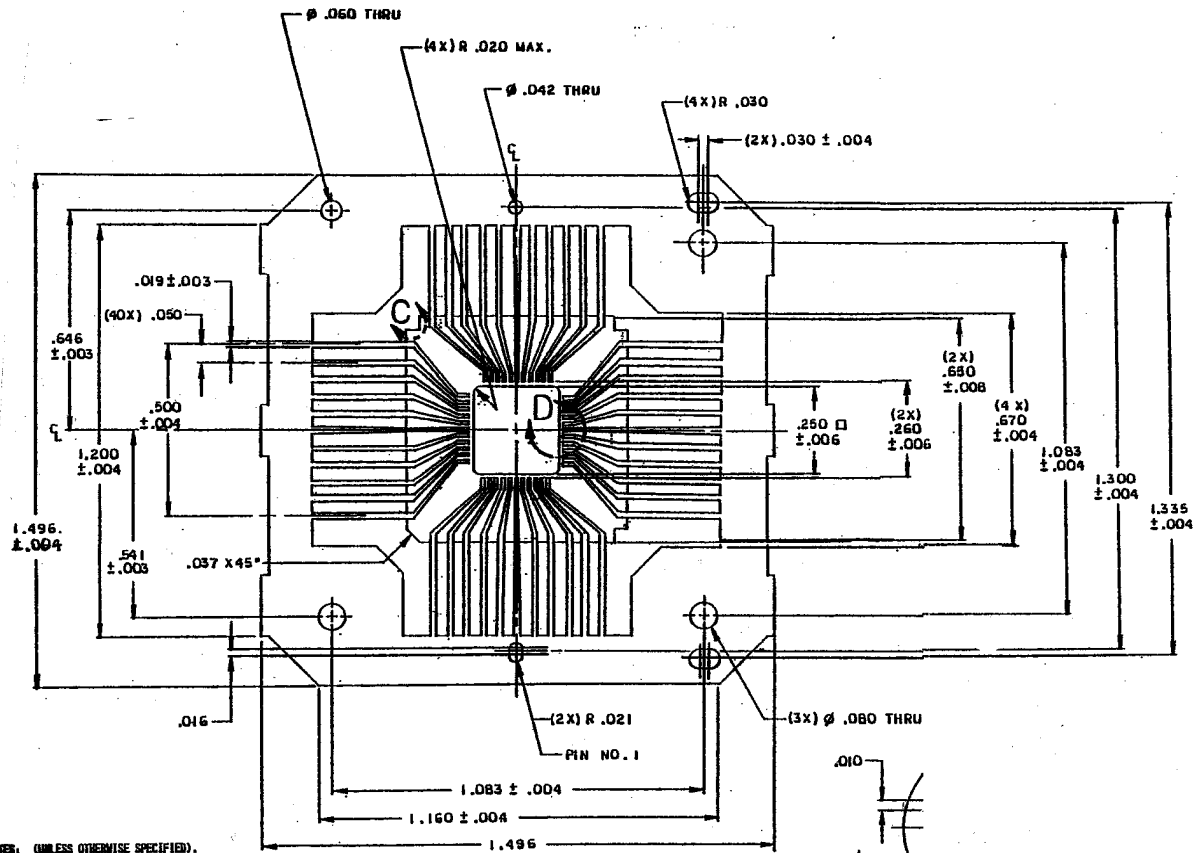

NOTES: (UNLESS OTHERWISE SPECIFIED).

1. DIMENSIONS MUST BE IN ACCORDANCE WITH BAYTHORN'S MATERIAL AND SUPPLY SPECIFICATION 969.
2. MATERIAL: ALLOY 42 OR KOVAR IN ACCORDANCE WITH MIL-R-38510, .006 ±.0006 THICK, TYPE A OR B.
3. FINISH: ALUMINUM THICKNESS .0001 - .0006; (100 TO 600 MICRONS).
4. LEADS TO BE COVERED WITH ALUMINUM .020 MINIMUM FROM LEAD TIP. THERE MUST BE A .020 MINIMUM DIAMETER FLAT AREA WITHIN THE .020 MINIMUM COATED AREA.
5. ALL DIMENSIONS SYMMETRICAL ABOUT CENTER-LINE UNLESS OTHERWISE SHOWN.
6. MAXIMUM BURR ALLOWED

	VERTICAL	HORIZONTAL
IN COATED AREA	.001	.002
ELSEWHERE	.002	.004

7. GOLD THICKNESS IN THE ATTACH AREA, 220 ±.020 MINIMUM.
8. THE BURR DESIGN IS A VENDOR OPTION.

9. STONES CATALOG NUMBER:

NUMBER	STK. No.	DESCRIPTION
C1	6205	KC10-7585/KC10 ON ENVIRONMENT
C2	6205	WITHOUT GOLD ON CAVITY KC10-7585/KC10 OR EQUIVALENT

10. "C2" IS PACKAGE CODE FOR INTERNAL USE ONLY.

