



No.	X or Y	No.	X or Y
1	0.075 (.003)	21	2.995 (.118)
2	0.208 (.008)	22	3.142 (.124)
3	0.358 (.014)	23	3.308 (.130)
4	0.491 (.019)	24	3.458 (.138)
5	0.642 (.025)	25	3.627 (.143)
6	0.775 (.031)	26	3.780 (.149)
7	0.926 (.038)	27	3.953 (.156)
8	1.061 (.042)	28	4.109 (.162)
9	1.213 (.048)	29	4.286 (.169)
10	1.348 (.053)	30	4.446 (.175)
11	1.501 (.059)	31	4.627 (.182)
12	1.638 (.064)	32	4.791 (.189)
13	1.792 (.071)	33	4.977 (.196)
14	1.930 (.076)	34	5.145 (.203)
15	2.087 (.082)	35	5.336 (.210)
16	2.227 (.088)	36	5.508 (.217)
17	2.385 (.094)	37	5.705 (.225)
18	2.527 (.099)	38	5.881 (.232)
19	2.688 (.106)	39	6.084 (.240)
20	2.832 (.111)	40	6.266 (.247)



TARGET MARK  
No.1,41,81,121PIN

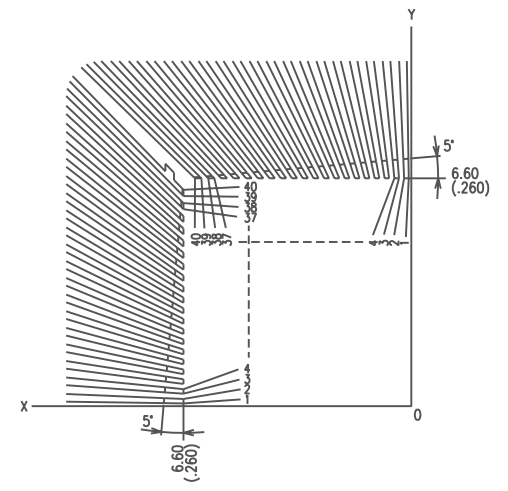

MODIFICATIONS	CHANGE	DATE	DRAWN	CHECKED	APPROVED	NAME		TOLERANCES: UNLESS OTHERWISE SPECIFIED	DRAWN	CHECKED
						160LD QUAD K-PACK'Z'(13.0S)			APPROVED	DATE
						SCALE	MATERIAL			
						5 : 1				JUN.09'87
						KYOCERA CORPORATION		KYOTO JAPAN	DWG No. QC-160305-WZ	

