


SHALLOW-C

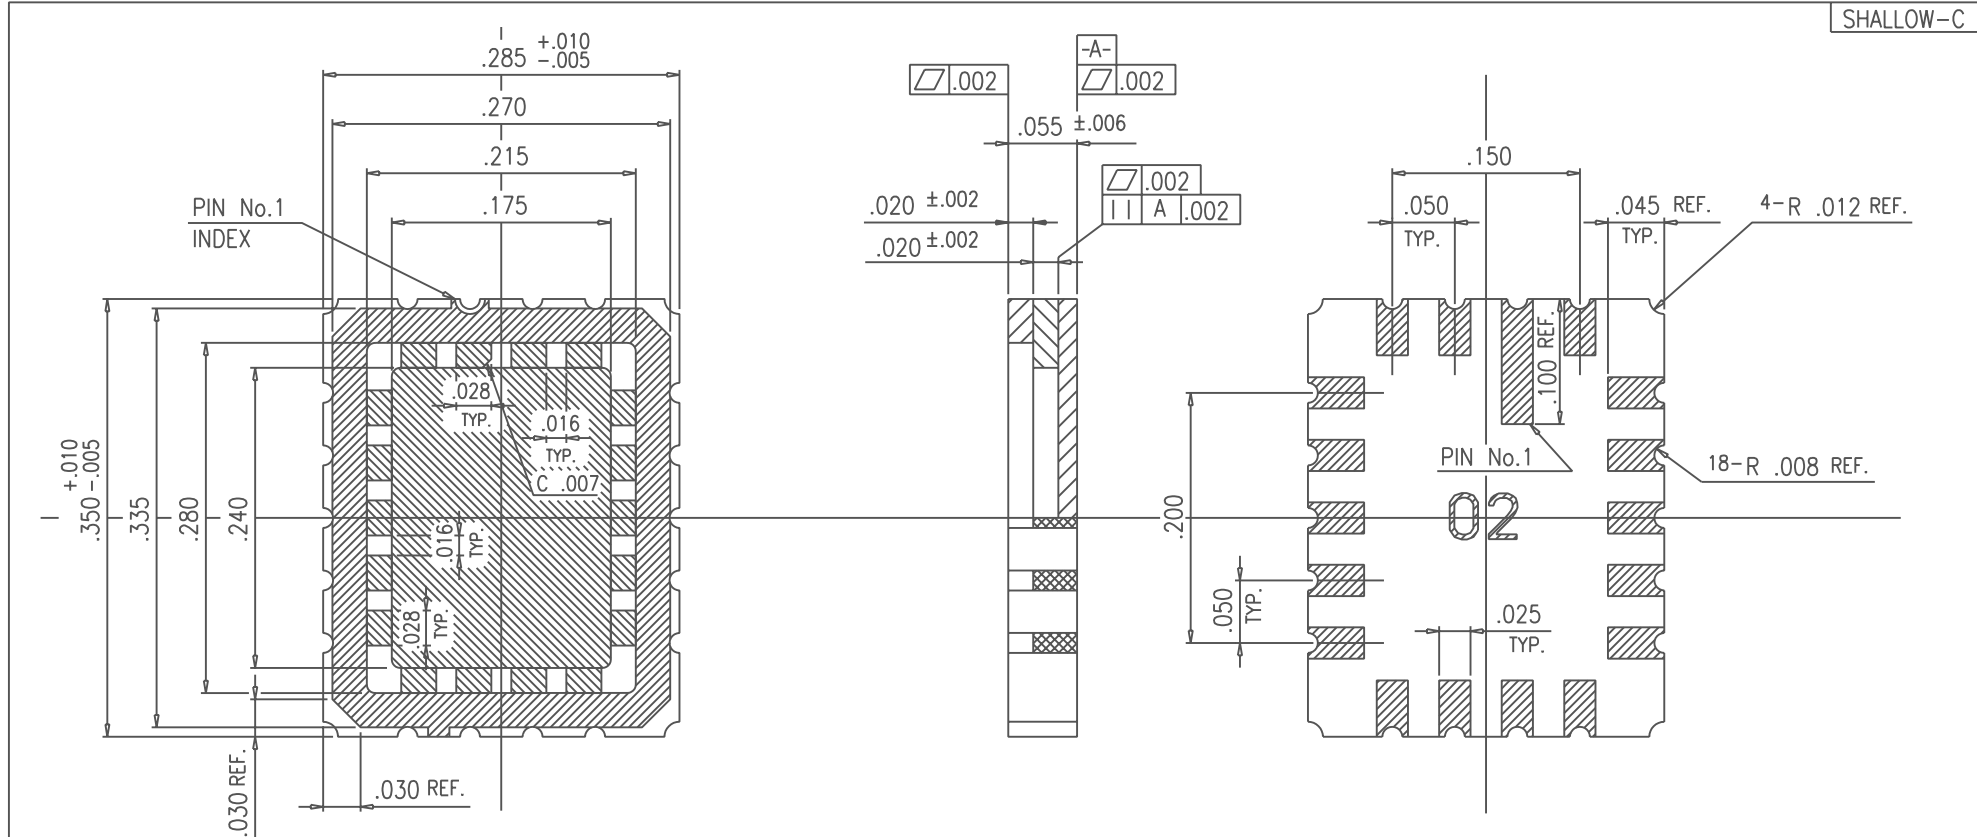


- NOTES;
- ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCHES MIN. THICKNESS OVER NICKEL PLATING. UNLESS OTHERWISE SPECIFIED IN PURCHASE ORDER.
 - FLATNESS PERTAINS TO METALLIZED PADS ONLY.
 - LEAD TO LEAD LEAKAGE MUST NOT EXCEED 5 NANO AMPS AT 100V D.C.

4. NO PIN CONNECTED TO SEAL AREA AND DIE ATTACH PAD. (ZERO GROUND)

MODIFICATIONS	CHANGE					DATE	DRAWN	CHECKED	APPROVED	NAME	18 LCC (.175x.240 CAV.)	TOLERANCES: UNLESS OTHERWISE SPECIFIED	DRAWN	CHECKED	APPROVED	DATE	
										SCALE	10/1	MATERIAL	KYOCERA A-440	± .005	N.U	O.M	'81-5-18
											KYOCERA CORPORATION KYOTO JAPAN	THIRD ANGLE PROJECTION	DRAWING NO.			SHEET 1/1	
									PB-12970								

PB-60894 MOD.



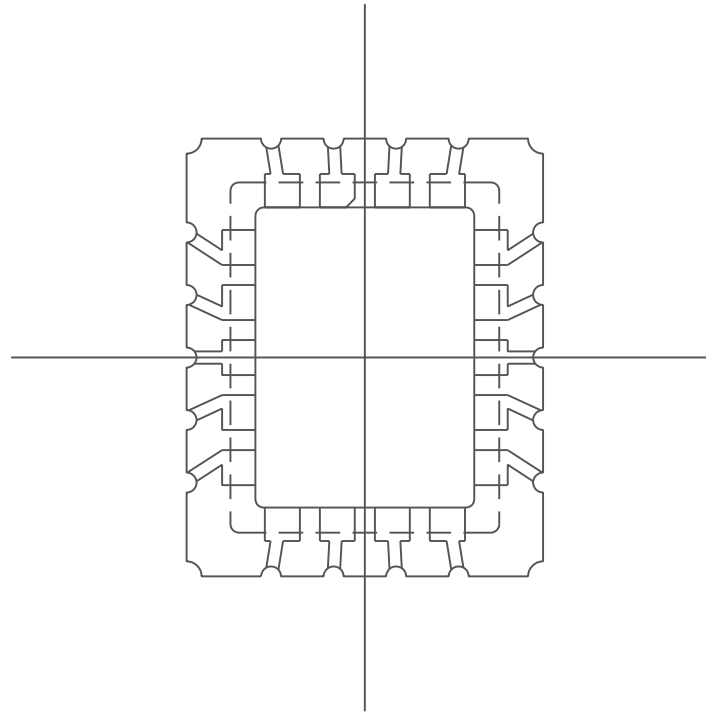

B/F

MODIFICATIONS						NAME	18 LCC (.175x.240 CAV.)	TOLERANCES: UNLESS OTHERWISE SPECIFIED	DRAWN	CHECKED	APPROVED	DATE
						SCALE	10/1		S.M	UE	K.H	APR.13.'99
						MATERIAL	KYOCERA A-440	THIRD ANGLE PROJECTION				
	CHANGE	DATE	DRAWN	CHECKED	APPROVED		KYOCERA CORPORATION KYOTO JAPAN	DRAWING NO.	PB-12970 REF.		SHEET	/



