


SSM P/N HDR25410

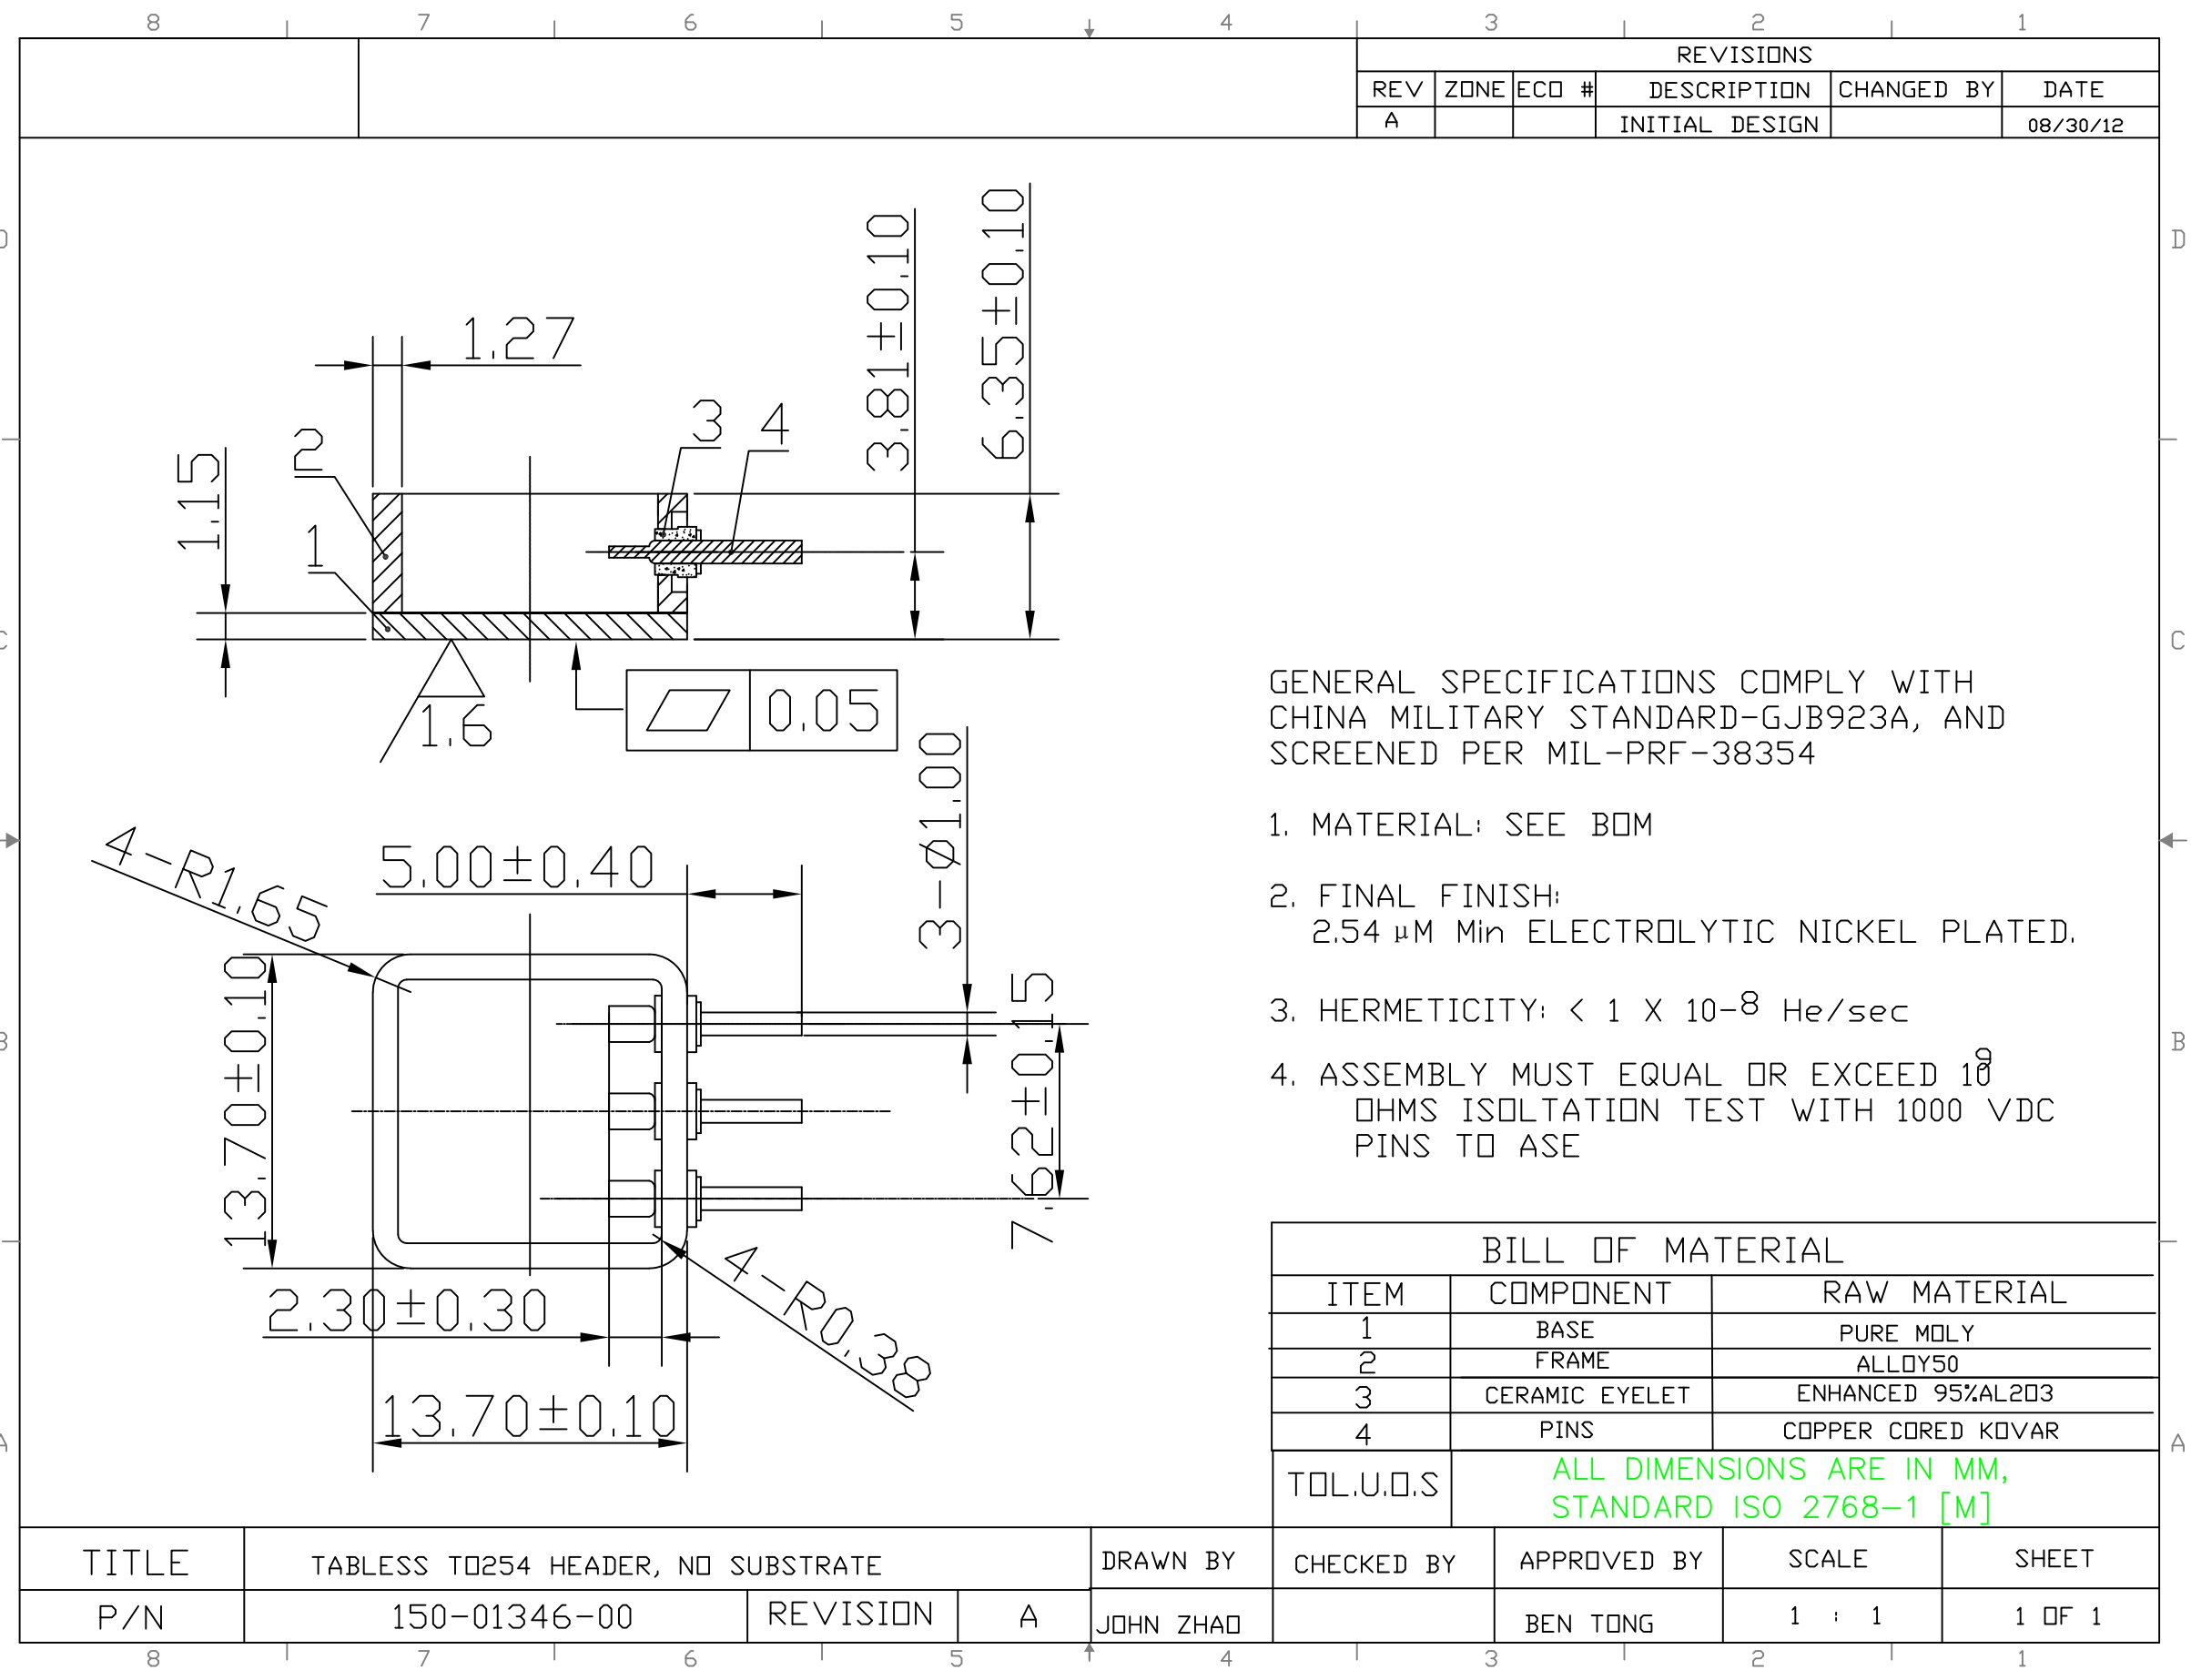

REVISIONS					
REV	ZONE	ECD #	DESCRIPTION	CHANGED BY	DATE
A			INITIAL DESIGN		08/30/12

GENERAL SPECIFICATIONS COMPLY WITH CHINA MILITARY STANDARD-GJB923A, AND SCREENED PER MIL-PRF-38354

1. MATERIAL: SEE BOM
2. FINAL FINISH:
2.54 μM Min ELECTROLYTIC NICKEL PLATED.
3. HERMETICITY: < 1 X 10⁻⁸ He/sec
4. ASSEMBLY MUST EQUAL OR EXCEED 10⁹ OHMS ISOLTATION TEST WITH 1000 VDC PINS TO ASE

BILL OF MATERIAL		
ITEM	COMPONENT	RAW MATERIAL
1	BASE	PURE MOLY
2	FRAME	ALLOY50
3	CERAMIC EYELET	ENHANCED 95%AL2O3
4	PINS	COPPER CORED KOVAR
TOL.U.D.S		ALL DIMENSIONS ARE IN MM, STANDARD ISO 2768-1 [M]

TITLE	TABLESS TQ254 HEADER, NO SUBSTRATE		DRAWN BY	CHECKED BY	APPROVED BY	SCALE	SHEET
P/N	150-01346-00	REVISION	A	JOHN ZHAO	BEN TONG	1 : 1	1 OF 1